


# K-WFV 3/2 RASTEND FUS

3/2-way foot-operated valves (bistable, latching, with foot guard)

**HANSA FLEX**

## Vlastnosti

|  |   |
|--|---|
| Prevádzkový tlak                       | 2.5 - 10 bar                                |
| Rozsah teplôt                          | -10 °C to +60 °C                            |
| Prietok pri 6,3 bar a $\Delta$ 0,5 bar | 60 NI/min (4 mm and M5), 640 NI/min (G 1/4) |
| Prietok pri 6,3 bar a $\Delta$ 1 bar   | 95 NI/min (4 mm and M5), 840 NI/min (G 1/4) |

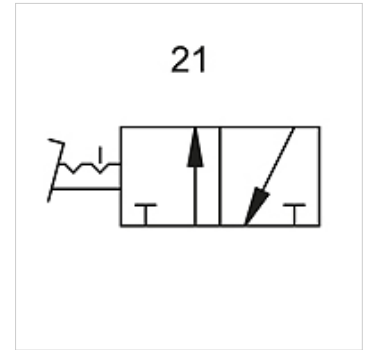

## Poznámka

Ďalšie údaje na vyžiadanie.

## Popis

Foot-operated valves, 3/2- and 5/2-way types, bistable or monostable (non-latching).

## Výrobok

| Označenie      | Prípojka | Schéma zapojenia číslo |
|----------------|----------|------------------------|
| K- 07 15 00 21 | M 5      | 21                     |
| K- 07 15 00 22 | 4 mm     | 21                     |