


K-NORMZYLINDER

Standard cylinders

HANSA FLEX

Vlastnosti

| | |
|-------------------|-----------------------------------------------------------------------------------------------------|
| Médiá | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| Pracovný tlak | Max. 10 bar |
| Reakčný tlak | 0,4 bar (Ø 32 bis Ø 40), 0,3 bar (Ø 50 bis Ø 63), 0,2 bar (Ø 80 bis Ø 125) |
| Rozsah teplôt | -20 °C to +70 °C (Ø 32 to Ø 63) -10 °C to +70 °C (Ø 80 to Ø 125) |
| Montáž | Heads / jacket with self-tapping screws |
| Piestová tyč | C45 steel, hard chrome-plated |
| rúrka | Anodised aluminium jacket with integrated T-slots |
| Piest | POM (Ø 20 to Ø 63); Aluminium (Ø 80 to Ø 125) |
| Tesniaci materiál | NBR |

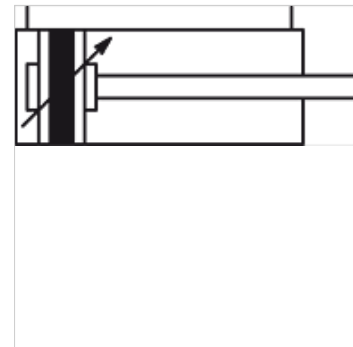

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

These cylinders are ideal for a wide range of applications owing to their robust design and excellent value for money. The standard type has a double-acting cylinder and features a magnetic piston as well as integrated cushioning. The magnetic switches can be mounted in two T-slots on the same side as the compressed air supply. Cylinders of the same type can also be supplied on request with fixing parts for magnetic switches on three sides. The version with a 125 mm bore is provided with fixing accessories on three sides as standard.

Výrobok

| Označenie | Ø piest | Zdvih (mm) | Prípojka | Ø piestová tyč (mm) | Vonkajší závit piestovej tyče |
|----------------|---------|------------|----------|---------------------|-------------------------------|
| K- 07 15 15 90 | 32 mm | 25 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 15 91 | 32 mm | 50 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 15 92 | 32 mm | 80 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 15 93 | 32 mm | 100 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 15 94 | 32 mm | 125 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 15 95 | 32 mm | 160 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 15 96 | 32 mm | 200 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 15 97 | 32 mm | 250 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 15 98 | 32 mm | 320 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 15 99 | 32 mm | 400 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 16 00 | 32 mm | 500 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 16 01 | 32 mm | 600 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 16 02 | 32 mm | 800 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 16 03 | 40 mm | 25 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 16 04 | 40 mm | 50 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 16 05 | 40 mm | 80 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 16 06 | 40 mm | 100 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 16 07 | 40 mm | 125 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 16 08 | 40 mm | 160 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 16 09 | 40 mm | 200 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 16 10 | 40 mm | 250 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 16 11 | 40 mm | 320 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 16 12 | 40 mm | 400 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 16 13 | 40 mm | 500 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 16 14 | 40 mm | 600 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 16 15 | 40 mm | 800 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 16 16 | 50 mm | 25 | G 1/4 | 20 | M 16 x 1.5 |
| K- 07 15 16 17 | 50 mm | 50 | G 1/4 | 20 | M 16 x 1.5 |
| K- 07 15 16 18 | 50 mm | 80 | G 1/4 | 20 | M 16 x 1.5 |
| K- 07 15 16 19 | 50 mm | 100 | G 1/4 | 20 | M 16 x 1.5 |
| K- 07 15 16 20 | 50 mm | 125 | G 1/4 | 20 | M 16 x 1.5 |
| K- 07 15 16 21 | 50 mm | 160 | G 1/4 | 20 | M 16 x 1.5 |
| K- 07 15 16 22 | 50 mm | 200 | G 1/4 | 20 | M 16 x 1.5 |
| K- 07 15 16 23 | 50 mm | 250 | G 1/4 | 20 | M 16 x 1.5 |
| K- 07 15 16 24 | 50 mm | 320 | G 1/4 | 20 | M 16 x 1.5 |
| K- 07 15 16 25 | 50 mm | 400 | G 1/4 | 20 | M 16 x 1.5 |



Napriek čo najstarostlivejšej kontrole nemôžeme vylúčiť chyby a nepreberáme žiadnu záruku za zahrnuté údaje.

16.07.2024

HANSA-FLEX AG

www.hansa-flex.com

1

Výrobok

| Označenie | Ø piest | Zdvih (mm) | Prípojka | Ø piestová tyč (mm) | Vonkajší závit piestovej tyče |
|----------------|---------|------------|----------|---------------------|-------------------------------|
| K- 07 15 16 26 | 50 mm | 500 | G 1/4 | 20 | M 16 x 1.5 |
| K- 07 15 16 27 | 50 mm | 600 | G 1/4 | 20 | M 16 x 1.5 |
| K- 07 15 16 28 | 50 mm | 800 | G 1/4 | 20 | M 16 x 1.5 |
| K- 07 15 16 29 | 63 mm | 25 | G 3/8 | 20 | M 16 x 1.5 |
| K- 07 15 16 30 | 63 mm | 50 | G 3/8 | 20 | M 16 x 1.5 |
| K- 07 15 16 31 | 63 mm | 80 | G 3/8 | 20 | M 16 x 1.5 |
| K- 07 15 16 32 | 63 mm | 100 | G 3/8 | 20 | M 16 x 1.5 |
| K- 07 15 16 33 | 63 mm | 125 | G 3/8 | 20 | M 16 x 1.5 |
| K- 07 15 16 34 | 63 mm | 160 | G 3/8 | 20 | M 16 x 1.5 |
| K- 07 15 16 35 | 63 mm | 200 | G 3/8 | 20 | M 16 x 1.5 |
| K- 07 15 16 36 | 63 mm | 250 | G 3/8 | 20 | M 16 x 1.5 |
| K- 07 15 16 37 | 63 mm | 320 | G 3/8 | 20 | M 16 x 1.5 |
| K- 07 15 16 38 | 63 mm | 400 | G 3/8 | 20 | M 16 x 1.5 |
| K- 07 15 16 39 | 63 mm | 500 | G 3/8 | 20 | M 16 x 1.5 |
| K- 07 15 16 40 | 63 mm | 600 | G 3/8 | 20 | M 16 x 1.5 |
| K- 07 15 16 41 | 63 mm | 800 | G 3/8 | 20 | M 16 x 1.5 |
| K- 07 15 16 42 | 80 mm | 25 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 16 43 | 80 mm | 50 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 16 44 | 80 mm | 80 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 16 45 | 80 mm | 100 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 16 46 | 80 mm | 125 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 16 47 | 80 mm | 160 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 16 48 | 80 mm | 200 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 16 49 | 80 mm | 250 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 16 50 | 80 mm | 320 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 16 51 | 80 mm | 400 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 16 52 | 80 mm | 500 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 16 53 | 80 mm | 600 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 16 54 | 80 mm | 800 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 15 64 | 100 mm | 25 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 15 65 | 100 mm | 50 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 15 66 | 100 mm | 80 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 15 67 | 100 mm | 100 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 15 68 | 100 mm | 125 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 15 69 | 100 mm | 160 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 15 70 | 100 mm | 200 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 15 71 | 100 mm | 250 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 15 72 | 100 mm | 320 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 15 73 | 100 mm | 400 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 15 74 | 100 mm | 500 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 15 75 | 100 mm | 600 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 15 76 | 100 mm | 800 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 15 77 | 125 mm | 25 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 15 78 | 125 mm | 50 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 15 79 | 125 mm | 80 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 15 80 | 125 mm | 100 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 15 81 | 125 mm | 125 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 15 82 | 125 mm | 160 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 15 83 | 125 mm | 200 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 15 84 | 125 mm | 250 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 15 85 | 125 mm | 320 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 15 86 | 125 mm | 400 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 15 87 | 125 mm | 500 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 15 88 | 125 mm | 600 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 15 89 | 125 mm | 800 | G 1/2" | 32 | M 27 x 2 |

Príslušenstvo

| | |
|-----------------------------|------------------------------|
| K-FUSSBEFESTIGUNG 3 | Foot model |
| K-SCHWENKGABELBEFESTIG | Female hinge model |
| K-SCHWENKAUGENBEFEST 1 | Male hinge model |
| K-SPHAERISCHE SCHWENKAUGENB | Articulated male hinge model |
| K-GEGENLAGER 1 | Counter-hinge model |
| K-FRONT ODER BODENFLANSCH | Flange model |



