

K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

HANSA FLEX

Vlastnosti

Rozsah teplôt -20 °C to +60 °C

Tlak Max. 12 bar



Rozsah tlaku Max. 12 bar

Teplota -20 °C to +60 °C

Prietok 0 - 400 l/min

pružina Stainless-steel

Kryt Brass

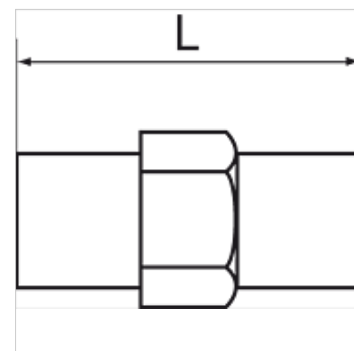

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

Výrobok

Označenie	Závit	Pracovný tlak prednastavený	D (mm)
K- 07 25 03 03	G 1/4 außen/male	2 bar	24,0
K- 07 25 03 04	G 1/4 außen/male	4 bar	24,0
K- 07 25 03 05	G 1/4 außen/male	6 bar	24,0