



# K-VT 2 ABGAENGE G

Manifolds

**HANSA FLEX**

## Vlastnosti

Vstupný tlak	0 - 9 bar
Teplota média	max. 70 °C
Teplota okolia	Max. 70 °C
Tesniaci materiál	NBR
Kryt	Die-cast aluminium
Ďalšie údaje	User manual on request

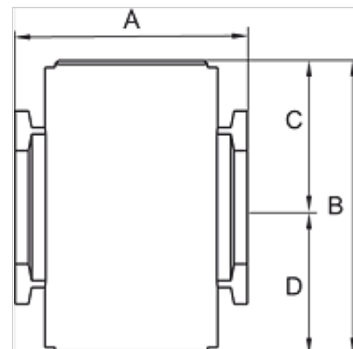

## Výrobok

Označenie	Závit	A: (mm)	B	C (mm)	D: (mm)	Veľkosť
K- 07 25 12 19	G 1/4	35,0	44,0 mm	22,0	22,0	200
K- 07 25 12 20	G 3/8	35,0	44,0 mm	22,0	22,0	200
K- 07 25 12 21	G 3/8	42,0	52,0 mm	26,0	26,0	300
K- 07 25 12 22	G 1/2	42,0	52,0 mm	26,0	26,0	300
K- 07 25 12 23	G 3/4	60,0	76,0 mm	38,0	38,0	600
K- 07 25 12 24	G 1	60,0	76,0 mm	38,0	38,0	600

## Príslušenstvo

K-VERBINDUNGSELEMENTE	Connecting sets
K-WANDHALTER	Wall bracket