



K-XRD STECKANSCHLUSS Z SCH AGR OR

Straight non-return valves, flow direction from port to tube, parallel male thread with O-ring

HANSA FLEX

Vlastnosti

Pracovný tlak	Max. 10 bar, vacuum
Oblasť použitia	Air, vacuum
odporučené hadice	PU or PA (nylon)
Médiá	Tlakový vzduch
Norma	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring
Rozsah teplôt	0 °C to +60 °C
Tesniaca plocha	O-ring (NBR)
Materiál	Plastic, Nickel plated brass
Prítlačný krúžok	Plastic

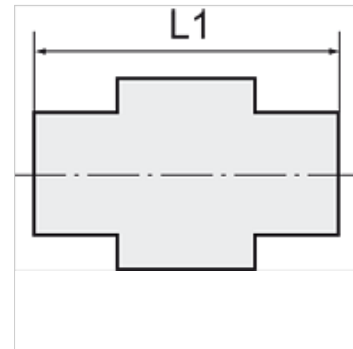

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

The non-return function of these push-in fittings prevents the air from flowing back. the unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

Výrobok

Označenie	Závit	pre vonkajší Ø hadice	L1 (mm)	Otvárací tlak (bar)	SW
K- 07 40 08 73	M 5	4 mm	31,0	0,2	10 mm
K- 07 40 08 68	G 1/8	4 mm	24,2	0,2	14 mm
K- 07 40 08 69	G 1/8	6 mm	31,0	0,2	14 mm
K- 07 40 08 70	G 1/8	8 mm	32,8	0,2	14 mm
K- 07 40 08 66	G 1/4	6 mm	33,0	0,2	17 mm
K- 07 40 08 67	G 1/4	8 mm	34,8	0,2	17 mm
K- 07 40 08 71	G 3/8	10 mm	41,0	0,2	20 mm
K- 07 40 08 72	G 3/8	12 mm	42,5	0,2	21 mm
K- 07 40 08 64	G 1/2	10 mm	43,0	0,2	24 mm
K- 07 40 08 65	G 1/2	12 mm	44,5	0,2	24 mm