# K-RUNDZYLINDER EINF DL O D MSI


Round cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, »MSI« Series

HANSA-FLEX

## Vlastnosti

| | |
|---|---|
| **Médiá** | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| **Pracovný tlak** | 1 - 10 bar (double-acting); 2 - 10 bar (single-acting) |
| **Rozsah teplôt** | -20 °C to +70 °C |
| **Piestová tyč** | Stainless steel 1.4301 |
| **Vyhotovenie** | Type "CA" = ground cover with threaded pin - swivel design<br>Type "CM" = ground cover with threaded pin round - swivel design |
| **Piest** | Stainless steel 1.4305 (8 to 12 mm); Alu (16 to 40 mm) |
| **Tesniaci materiál** | NBR |
| **valcová rúra** | Stainless steel 1.4301 |



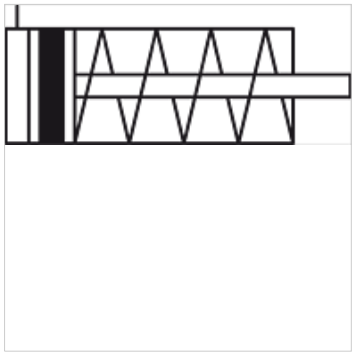

## Poznámka

Ďalšie údaje na vyžiadanie.

## Popis

Series "MSI" single-acting, pressureless retraction, Ø 8 - 40

## Výrobok

| Označenie | Ø piest | Zdvih (mm) | Vyhotovenie | Ø piestová tyč (mm) | Vonkajší závit piestovej tyče |
|---|---|---|---|---|---|
| **K- 07 15 19 46** | 8 mm | 10 | »CA« type | 4 | M 4 x 0.7 |
| **K- 07 15 19 47** | 8 mm | 15 | »CA« type | 4 | M 4 x 0.7 |
| **K- 07 15 19 48** | 8 mm | 20 | »CA« type | 4 | M 4 x 0.7 |
| **K- 07 15 19 49** | 8 mm | 25 | »CA« type | 4 | M 4 x 0.7 |
| **K- 07 15 19 50** | 8 mm | 30 | »CA« type | 4 | M 4 x 0.7 |
| **K- 07 15 19 51** | 8 mm | 40 | »CA« type | 4 | M 4 x 0.7 |
| **K- 07 15 19 52** | 8 mm | 50 | »CA« type | 4 | M 4 x 0.7 |
| **K- 07 15 19 53** | 10 mm | 10 | »CA« type | 4 | M 4 x 0.7 |
| **K- 07 15 19 54** | 10 mm | 15 | »CA« type | 4 | M 4 x 0.7 |
| **K- 07 15 19 55** | 10 mm | 20 | »CA« type | 4 | M 4 x 0.7 |
| **K- 07 15 19 56** | 10 mm | 25 | »CA« type | 4 | M 4 x 0.7 |
| **K- 07 15 19 57** | 10 mm | 30 | »CA« type | 4 | M 4 x 0.7 |
| **K- 07 15 19 58** | 10 mm | 40 | »CA« type | 4 | M 4 x 0.7 |
| **K- 07 15 19 59** | 10 mm | 50 | »CA« type | 4 | M 4 x 0.7 |
| **K- 07 15 19 60** | 12 mm | 10 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 61** | 12 mm | 15 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 62** | 12 mm | 20 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 63** | 12 mm | 25 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 64** | 12 mm | 30 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 65** | 12 mm | 40 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 66** | 12 mm | 50 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 67** | 16 mm | 10 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 68** | 16 mm | 15 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 69** | 16 mm | 20 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 70** | 16 mm | 25 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 71** | 16 mm | 30 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 72** | 16 mm | 40 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 73** | 16 mm | 50 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 74** | 16 mm | 60 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 75** | 16 mm | 75 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 76** | 16 mm | 80 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 77** | 16 mm | 100 | »CA« type | 6 | M 6 x 1 |
| **K- 07 15 19 78** | 20 mm | 10 | »CA« type | 8 | M 8 x 1.25 |
| **K- 07 15 19 79** | 20 mm | 15 | »CA« type | 8 | M 8 x 1.25 |
| **K- 07 15 19 80** | 20 mm | 20 | »CA« type | 8 | M 8 x 1.25 |
| **K- 07 15 19 81** | 20 mm | 25 | »CA« type | 8 | M 8 x 1.25 |
| **K- 07 15 19 82** | 20 mm | 30 | »CA« type | 8 | M 8 x 1.25 |
| **K- 07 15 19 83** | 20 mm | 40 | »CA« type | 8 | M 8 x 1.25 |

*Napriek čo najstarostlivejšej kontrole nemôžeme vylúčiť chyby a nepreberáme žiadnu záruku za zahrnuté údaje.*

# K-RUNDZYLINDER EINF DL O D MSI

Round cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, »MSI« Series

HANSA-FLEX

## Výrobok

| Označenie | Ø piest | Zdvih (mm) | Vyhotovenie | Ø piestová tyč (mm) | Vonkajší závit piestovej tyče |
|---|---|---|---|---|---|
| **K- 07 15 19 84** | 20 mm | 50 | »CA« type | 8 | M 8 x 1.25 |
| **K- 07 15 19 85** | 20 mm | 60 | »CA« type | 8 | M 8 x 1.25 |
| **K- 07 15 19 86** | 20 mm | 75 | »CA« type | 8 | M 8 x 1.25 |
| **K- 07 15 19 87** | 20 mm | 80 | »CA« type | 8 | M 8 x 1.25 |
| **K- 07 15 19 88** | 20 mm | 100 | »CA« type | 8 | M 8 x 1.25 |
| **K- 07 15 19 89** | 20 mm | 125 | »CA« type | 8 | M 8 x 1.25 |
| **K- 07 15 19 90** | 20 mm | 150 | »CA« type | 8 | M 8 x 1.25 |
| **K- 07 15 19 91** | 25 mm | 10 | »CA« type | 10 | M 10 x 1.25 |
| **K- 07 15 19 92** | 25 mm | 15 | »CA« type | 10 | M 10 x 1.25 |
| **K- 07 15 19 93** | 25 mm | 20 | »CA« type | 10 | M 10 x 1.25 |
| **K- 07 15 19 94** | 25 mm | 25 | »CA« type | 10 | M 10 x 1.25 |
| **K- 07 15 19 95** | 25 mm | 30 | »CA« type | 10 | M 10 x 1.25 |
| **K- 07 15 19 96** | 25 mm | 40 | »CA« type | 10 | M 10 x 1.25 |
| **K- 07 15 19 97** | 25 mm | 50 | »CA« type | 10 | M 10 x 1.25 |
| **K- 07 15 19 98** | 25 mm | 60 | »CA« type | 10 | M 10 x 1.25 |
| **K- 07 15 19 99** | 25 mm | 75 | »CA« type | 10 | M 10 x 1.25 |
| **K- 07 15 20 00** | 25 mm | 80 | »CA« type | 10 | M 10 x 1.25 |
| **K- 07 15 20 01** | 25 mm | 100 | »CA« type | 10 | M 10 x 1.25 |
| **K- 07 15 20 02** | 25 mm | 125 | »CA« type | 10 | M 10 x 1.25 |
| **K- 07 15 20 03** | 25 mm | 150 | »CA« type | 10 | M 10 x 1.25 |
| **K- 07 15 20 04** | 32 mm | 10 | »CM« type | 12 | M 10 x 1.25 |
| **K- 07 15 20 05** | 32 mm | 15 | »CM« type | 12 | M 10 x 1.25 |
| **K- 07 15 20 06** | 32 mm | 20 | »CM« type | 12 | M 10 x 1.25 |
| **K- 07 15 20 07** | 32 mm | 25 | »CM« type | 12 | M 10 x 1.25 |
| **K- 07 15 20 08** | 32 mm | 30 | »CM« type | 12 | M 10 x 1.25 |
| **K- 07 15 20 09** | 32 mm | 40 | »CM« type | 12 | M 10 x 1.25 |
| **K- 07 15 20 10** | 32 mm | 50 | »CM« type | 12 | M 10 x 1.25 |
| **K- 07 15 20 11** | 32 mm | 60 | »CM« type | 12 | M 10 x 1.25 |
| **K- 07 15 20 12** | 32 mm | 75 | »CM« type | 12 | M 10 x 1.25 |
| **K- 07 15 20 13** | 32 mm | 80 | »CM« type | 12 | M 10 x 1.25 |
| **K- 07 15 20 14** | 32 mm | 100 | »CM« type | 12 | M 10 x 1.25 |
| **K- 07 15 20 15** | 32 mm | 125 | »CM« type | 12 | M 10 x 1.25 |
| **K- 07 15 20 16** | 32 mm | 150 | »CM« type | 12 | M 10 x 1.25 |
| **K- 07 15 20 17** | 40 mm | 10 | »CM« type | 16 | M 12 x 1.25 |
| **K- 07 15 20 18** | 40 mm | 15 | »CM« type | 16 | M 12 x 1.25 |
| **K- 07 15 20 19** | 40 mm | 20 | »CM« type | 16 | M 12 x 1.25 |
| **K- 07 15 20 20** | 40 mm | 25 | »CM« type | 16 | M 12 x 1.25 |
| **K- 07 15 20 21** | 40 mm | 30 | »CM« type | 16 | M 12 x 1.25 |
| **K- 07 15 20 22** | 40 mm | 40 | »CM« type | 16 | M 12 x 1.25 |
| **K- 07 15 20 23** | 40 mm | 50 | »CM« type | 16 | M 12 x 1.25 |
| **K- 07 15 20 24** | 40 mm | 60 | »CM« type | 16 | M 12 x 1.25 |
| **K- 07 15 20 25** | 40 mm | 75 | »CM« type | 16 | M 12 x 1.25 |
| **K- 07 15 20 26** | 40 mm | 80 | »CM« type | 16 | M 12 x 1.25 |
| **K- 07 15 20 27** | 40 mm | 100 | »CM« type | 16 | M 12 x 1.25 |
| **K- 07 15 20 28** | 40 mm | 125 | »CM« type | 16 | M 12 x 1.25 |
| **K- 07 15 20 29** | 40 mm | 150 | »CM« type | 16 | M 12 x 1.25 |

## Príslušenstvo

| | |
|---|---|
| **K-FUSSBEFESTIGUNG TYP LB 1** | Foot model, »LB« type |
| **K-FLANSCHBEFESTIGUNG TYP FA3** | Flange model, »FA« type |
| **K-SCHWENKLAGER TYP SDB** | Counter-hinge model, »SDB« type |
| **K-SCHWENKGABELBEFESTIG TC** | Hinge head model, »TC« type |
| **K-GABELKOEPFE TYP Y 1** | Fork model, »Y« type |
| **K-GELENKAUGEN TYP UNIT 1** | Rod eye model, »UNIT« type |
| **K-SENSOREN CS1 RD MIT STECKER** | Sensors »CS1« type, cable with M8 plug |
| **K-SENSOREN CS1 RD OHNE STECKER** | Sensors »CS1« type, cable without plug |

*Napriek čo najstarostlivejšej kontrole nemôžeme vylúčiť chyby a nepreberáme žiadnu záruku za zahrnuté údaje.*