
K-T-VB POM
Union tees

Vlastnosti

Pracovný tlak	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Prevádzková teplota	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Materiál	Acetalpolymerisat (POM)
Tesniaci materiál	NBR



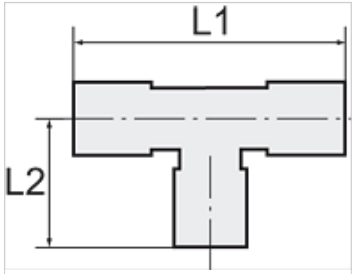

Poznámka
Ďalšie údaje na vyžiadanie.

Popis
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Výrobok

Označenie	pre vonkajší Ø hadice	L1 (mm)	L2 (mm)
K- 07 40 28 63	4 mm	37,1	18,5
K- 07 40 28 64	5 mm	36,9	18,4
K- 07 40 28 65	6 mm	41,0	20,5
K- 07 40 28 66	8 mm	44,0	22,0
K- 07 40 28 67	10 mm	52,6	26,3
K- 07 40 28 68	12 mm	66,4	33,2
K- 07 40 28 69	15 mm	76,8	38,4
K- 07 40 28 70	18 mm	90,6	45,3
K- 07 40 28 71	22 mm	99,3	49,6
K- 07 40 28 72	28 mm	126,2	63,1

Napriek čo najstarostlivejšej kontrole nemôžeme vylúčiť chyby a nepreberáme žiadnu záruku za zahrnuté údaje.