
K-T-VB PP
Union tees

Vlastnosti

Pracovný tlak	on request
Prevádzková teplota	Max. +20 °C
Materiál	Polypropylene (PP)
Tesniaci materiál	NBR



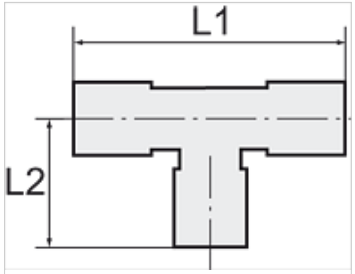

Poznámka
Ďalšie údaje na vyžiadanie.

Popis
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Výrobok

Označenie	pre vonkajší Ø hadice	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7

Napriek čo najstarostlivejšej kontrole nemôžeme vylúčiť chyby a nepreberáme žiadnu záruku za zahrnuté údaje.