

K-BKR MINI VA AG

Mini ball valves, stainless steel, 2 x male thread

HANSA FLEX

Vlastnosti

Prevádzkový tlak max. 64 bar

Prevádzková teplota -20 °C to +120 °C


tesnenie FKM (FPM)

Kryt Stainless steel 1.4401 (AISI 316)

ručná páka Aluminium

Tesnenie gule PTFE

Vreteno Stainless steel 1.4401 (AISI 316)

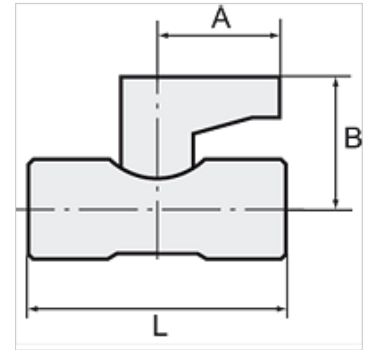

Poznámka

Ďalšie údaje na vyžiadanie.

Výrobok

Označenie	DN	Závit	A: (mm)	B (mm)	D (mm)
K- 07 30 20 19	7	G 1/4	22,8	26,5	50,0
K- 07 30 20 20	7	G 3/8	22,8	26,5	50,0
K- 07 30 20 21	9	G 1/2	22,8	28,3	58,0