
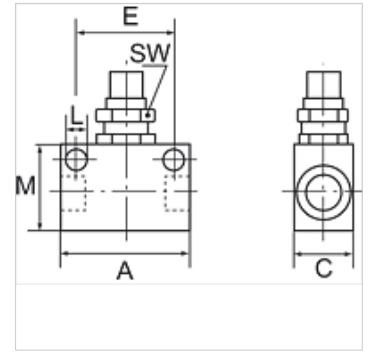


# K-DRV 2

## Unidirectional flow control valves

### Vlastnosti

Prevádzkový tlak	max. 10 bar
Prevádzková teplota	0 °C to +150 °C
Tesniaci materiál	FKM
Kryt	Stainless steel 1.4404
vnútorné diely	Stainless steel 1.4404

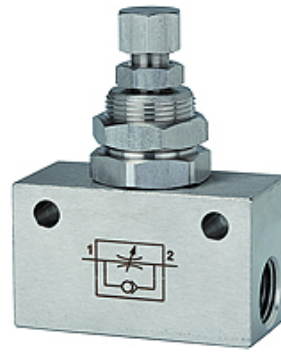

### Poznámka

Ďalšie údaje na vyžiadanie.

### Popis

Unidirectional flow control valve, restricted in the flow direction and free passage in the opposite direction.

### Výrobok

Označenie	Závit	A: (mm)	C (mm)	E (mm)	D (mm)	M (mm)	SW (mm)
K- 07 30 12 41	G 1/8	34,0	15,0	24,0	4,5	20,0	14
K- 07 30 12 42	G 1/4	50,0	25,0	35,0	5,5	30,0	22