



# K-L-AGR-K OR DRH VA

Male run tees, conical male thread acc. to ISO 7-1, stainless steel

**HANSA FLEX**

## Vlastnosti

<b>Rozsah tlaku</b>	Max. 25 bar
<b>odporučené hadice</b>	PTFE hose
<b>Rozsah teplôt</b>	-40 °C to +200 °C (depending on the hose quality and diameter)
<b>Materiál</b>	Ušľachtilá oceľ 1.4404
<b>tesnenie</b>	Pure metal

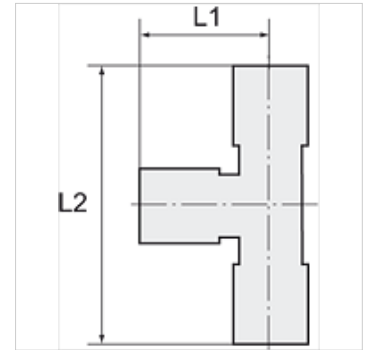

## Poznámka

Ďalšie údaje na vyžiadanie.

## Popis

Supplied without seals. For use with corrosive media and at high temperatures. Screw fitting series made of stainless steel for all applications where compliance with strict tightness, pressure and temperature requirements is essential. The parts are manufactured without rubber seals, in other words they are ideal for very high temperatures or for use with corrosive liquids, e.g. in cases when FPM is no longer suitable.

## Výrobok

Označenie	Závit	pre hadicu	L1 (mm)	L2 (mm)	SW1 (mm)	SW2 (mm)
K- 07 40 30 51	R 1/8	6 mm / 4 mm	23,0	40,0	12	10
K- 07 40 30 52	R 1/8	8 mm / 6 mm	23,0	40,0	14	10
K- 07 40 30 49	R 1/4	6 mm / 4 mm	23,0	44,5	12	10
K- 07 40 30 50	R 1/4	8 mm / 6 mm	23,0	44,5	14	10
K- 07 40 30 48	R 1/4	10 mm / 8 mm	26,0	47,5	16	12