
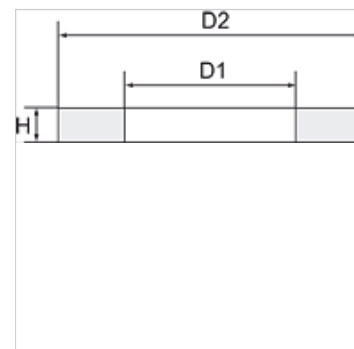


K-DICHTRING PVC

Captive seals, PVC, max. temperature 70 °C

HANSA FLEX



Poznámka

Ďalšie údaje na vyžiadanie.

Pokyny pre objednanie

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

Výrobok

Označenie	pre závit	D1 (mm)	D2 (mm)	V (mm)
K- 07 10 03 23	M 5	5,0	8,0	1,2
K- 07 10 03 27	G 1/2	21,0	25,4	2,0
K- 07 10 03 25	G 1/4	13,1	17,9	1,8
K- 07 10 03 26	G 3/8	16,8	21,4	1,8
K- 07 10 03 29	G 1	33,4	40,0	2,0
K- 07 10 03 28	G 3/4	26,6	32,0	2,0
K- 07 10 03 24	G 1/8	9,9	13,9	1,8