


K-RD DURCHGANGSFORM LEI VA

Check valve - straight-way type, lightweight series, stainless steel

HANSA FLEX

Vlastnosti

Prevádzkový tlak	2 - 16 bar
Prevádzková teplota	-20 °C to +150 °C
Otvárací tlak	min. 0.03 bar
Tesniaci materiál	FKM
pružina	Stainless steel 1.4301
Kryt	Stainless steel 1.4301

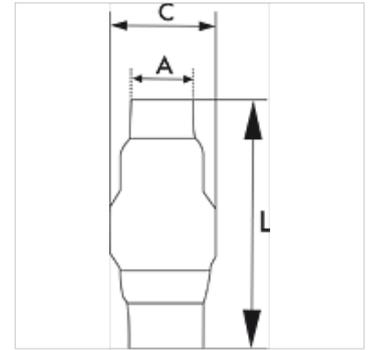

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Stainless steel check valve with full bore and very low opening pressure, no maintenance required. Applications: Compressed air, water, neutral gases, gaseous and liquid non-corrosive media, oils.

Výrobok

Označenie	Závit	A: (mm)	C (mm)	D (mm)
K- 07 30 29 23	G 1/4	20,0	32,0	55,9
K- 07 30 29 28	G 3/8	20,0	32,0	56,0
K- 07 30 29 22	G 1/2	25,0	32,0	55,6
K- 07 30 29 27	G 3/4	29,0	44,0	66,7
K- 07 30 29 19	G 1	36,0	53,0	83,6
K- 07 30 29 21	G 1 1/4	45,0	62,0	96,0
K- 07 30 29 20	G 1 1/2	51,0	78,0	114,0
K- 07 30 29 24	G 2	64,0	89,0	120,5
K- 07 30 29 25	G 2 1/2	80,0	113,0	141,5
K- 07 30 29 26	G 3	94,0	132,0	160,0