
K-WTEH SERIE ONE O DRS

Service units, »ONE« Series, without pressure switch

Vlastnosti

Vstupný tlak	Max. 10 bar
Rozsah teplôt	-10 °C to +50 °C
Médiá	Tlakový vzduch
Krytie	IP 65
Pracovný tlak	0.5 - 8 bar
Tlakový spínač	Changeover contact
Veľkosť pórov vo filtračnej vložke	20 µm
Meranie prietočného množstva	At 6,3 bar and Δp = 1 bar



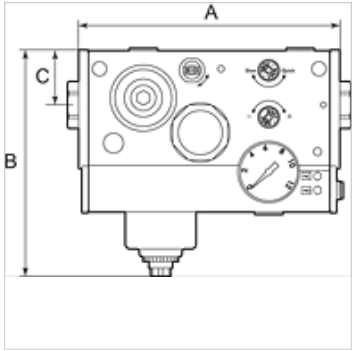

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

Pokyny pre objednanie

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

Výrobok

Označenie	Prípojka	Prietok (L/min)	A: (mm)	B	C (mm)	Napätie
K- 07 25 13 79	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 80	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 81	G 1/2"	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)

Napriek čo najstarostlivejšej kontrole nemôžeme vylúčiť chyby a nepreberáme žiadnu záruku za zahrnuté údaje.