

K-VSTO POM
Plugs

Vlastnosti

Pracovný tlak	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Prevádzková teplota	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Materiál	Acetalpolymerisat (POM)
Tesniaci materiál	NBR



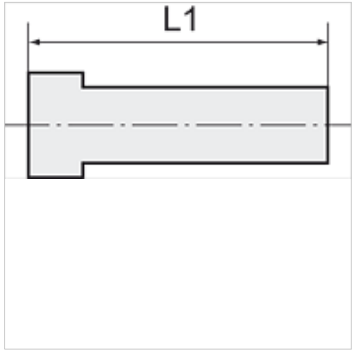

Poznámka
Ďalšie údaje na vyžiadanie.

Popis
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Výrobok

Označenie	Farba	L1 (mm)	Hrdlo (mm)
K- 07 40 29 11	červená	28,0	4
K- 07 40 29 12	červená	28,0	5
K- 07 40 29 13	červená	30,0	6
K- 07 40 29 14	červená	31,0	8
K- 07 40 29 15	červená	36,5	10
K- 07 40 29 16	červená	38,5	12
K- 07 40 29 17	čierna	45,0	15
K- 07 40 29 18	čierna	41,5	18
K- 07 40 29 19	čierna	45,0	22
K- 07 40 29 20	čierna	56,0	28

Napriek čo najstarostlivejšej kontrole nemôžeme vylúčiť chyby a nepreberáme žiadnu záruku za zahrnuté údaje.