

# K-RD STUECKE PP

Reducers

**HANSA FLEX**


## Vlastnosti

Pracovný tlak on request

Prevádzková teplota Max. +20 °C

Materiál Polypropylene (PP)

Tesniaci materiál NBR

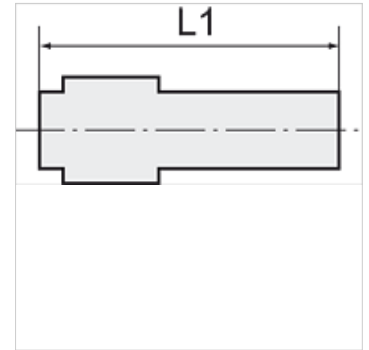

## Poznámka

Ďalšie údaje na vyžiadanie.

## Popis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Výrobok

| Označenie      | pre vonkajší Ø hadice | L1<br>(mm) | Hrdlo<br>(mm) |
|----------------|-----------------------|------------|---------------|
| K- 07 40 29 00 | 22 mm                 | 127,0      | 32            |
| K- 07 40 29 01 | 28 mm                 | 133,3      | 32            |