

K-RD STUECKE PP

Reducers

HANSA FLEX


Vlastnosti

Pracovný tlak on request

Prevádzková teplota Max. +20 °C

Materiál Polypropylene (PP)

Tesniaci materiál NBR

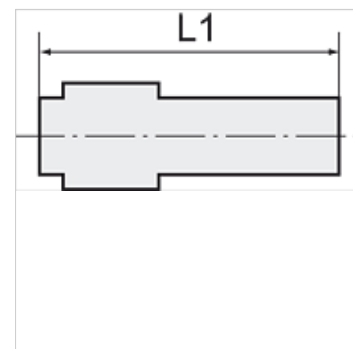

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Výrobok

| Označenie | pre vonkajší Ø hadice | L1 (mm) | Hrdlo (mm) |
|----------------|-----------------------|------------|---------------|
| K- 07 40 29 00 | 22 mm | 127,0 | 32 |
| K- 07 40 29 01 | 28 mm | 133,3 | 32 |