
# K-KURZH ZYL EINFACHW SER ASQ

Short-stroke cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, with female thread, »ASQ« Series

## Vlastnosti

| | |
|---|---|
| **Médiá** | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| **Pracovný tlak** | 1 - 10 bar (double-acting); 2 - 10 bar (single-acting) |
| **Rozsah teplôt** | -20 °C to +80 °C |
| **Piestová tyč** | Hardened steel, thick-chromed |
| **Piest** | Brass (12 to 16 mm); Aluminium (20 to 100 mm) |
| **Tesniaci materiál** | NBR |
| **valcová rúra** | Aluminium |



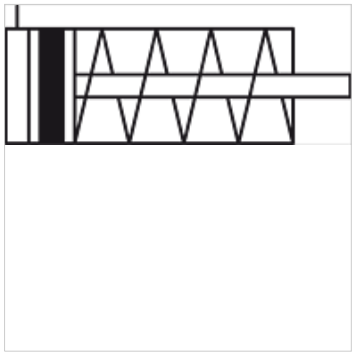

## Popis

Specially for use where space is in short supply. Version with magnetic piston. Short-stroke cylinder in two different versions: Series "ACQ", double-acting, Ø 12 – 100
Series "ASQ", single-acting, Ø 12 - 63

## Dodatočné informácie

Important: The scope of supply does not include a connector. Please order separately.
Other piston-Ø and stroke versions available on request.

## Výrobok

| Označenie | Ø piest | Zdvih (mm) | vyhotovenie | Ø piestová tyč (mm) | Vnútorný závit piestovej tyče |
|---|---|---|---|---|---|
| **K- 07 15 13 33** | 12 mm | 5 | 4 | 6 | M 3 x 0.5 |
| **K- 07 15 13 34** | 12 mm | 10 | 4 | 6 | M 3 x 0.5 |
| **K- 07 15 13 35** | 12 mm | 15 | 4 | 6 | M 3 x 0.5 |
| **K- 07 15 13 36** | 12 mm | 20 | 4 | 6 | M 3 x 0.5 |
| **K- 07 15 13 37** | 16 mm | 5 | 4 | 8 | M 4 x 0.7 |
| **K- 07 15 13 38** | 16 mm | 10 | 4 | 8 | M 4 x 0.7 |
| **K- 07 15 13 39** | 16 mm | 15 | 4 | 8 | M 4 x 0.7 |
| **K- 07 15 13 40** | 16 mm | 20 | 4 | 8 | M 4 x 0.7 |
| **K- 07 15 13 41** | 20 mm | 5 | 5 | 10 | M 5 x 0.8 |
| **K- 07 15 13 42** | 20 mm | 10 | 5 | 10 | M 5 x 0.8 |
| **K- 07 15 13 43** | 20 mm | 15 | 5 | 10 | M 5 x 0.8 |
| **K- 07 15 13 44** | 20 mm | 20 | 5 | 10 | M 5 x 0.8 |
| **K- 07 15 13 45** | 20 mm | 25 | 5 | 10 | M 5 x 0.8 |
| **K- 07 15 13 46** | 20 mm | 30 | 5 | 10 | M 5 x 0.8 |
| **K- 07 15 13 47** | 25 mm | 5 | 5 | 12 | M 6 x 1 |
| **K- 07 15 13 48** | 25 mm | 10 | 5 | 12 | M 6 x 1 |
| **K- 07 15 13 49** | 25 mm | 15 | 5 | 12 | M 6 x 1 |
| **K- 07 15 13 50** | 25 mm | 20 | 5 | 12 | M 6 x 1 |
| **K- 07 15 13 51** | 25 mm | 25 | 5 | 12 | M 6 x 1 |
| **K- 07 15 13 52** | 25 mm | 30 | 5 | 12 | M 6 x 1 |
| **K- 07 15 13 53** | 32 mm | 5 | 6 | 16 | M 8 x 1.25 |
| **K- 07 15 13 54** | 32 mm | 10 | 6 | 16 | M 8 x 1.25 |
| **K- 07 15 13 55** | 32 mm | 15 | 6 | 16 | M 8 x 1.25 |
| **K- 07 15 13 56** | 32 mm | 20 | 6 | 16 | M 8 x 1.25 |
| **K- 07 15 13 57** | 32 mm | 25 | 6 | 16 | M 8 x 1.25 |
| **K- 07 15 13 58** | 32 mm | 30 | 6 | 16 | M 8 x 1.25 |
| **K- 07 15 13 59** | 40 mm | 5 | 6 | 16 | M 8 x 1.25 |
| **K- 07 15 13 60** | 40 mm | 10 | 6 | 16 | M 8 x 1.25 |
| **K- 07 15 13 61** | 40 mm | 15 | 6 | 16 | M 8 x 1.25 |
| **K- 07 15 13 62** | 40 mm | 20 | 6 | 16 | M 8 x 1.25 |
| **K- 07 15 13 63** | 40 mm | 25 | 6 | 16 | M 8 x 1.25 |
| **K- 07 15 13 64** | 40 mm | 30 | 6 | 16 | M 8 x 1.25 |
| **K- 07 15 13 65** | 50 mm | 5 | 6 | 20 | M 10 x 1.5 |
| **K- 07 15 13 66** | 50 mm | 10 | 6 | 20 | M 10 x 1.5 |
| **K- 07 15 13 67** | 50 mm | 15 | 6 | 20 | M 10 x 1.5 |
| **K- 07 15 13 68** | 50 mm | 20 | 6 | 20 | M 10 x 1.5 |
| **K- 07 15 13 69** | 50 mm | 25 | 6 | 20 | M 10 x 1.5 |

*Napriek čo najstarostlivejšej kontrole nemôžeme vylúčiť chyby a nepreberáme žiadnu záruku za zahrnuté údaje.*

# K-KURZH ZYL EINFACHW SER ASQ

Short-stroke cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, with female thread, »ASQ« Series

HANSA FLEX

## Výrobok

| Označenie | Ø piest | Zdvih (mm) | vyhotovenie | Ø piestová tyč (mm) | Vnútorný závit piestovej tyče |
|---|---|---|---|---|---|
| **K- 07 15 13 70** | 50 mm | 30 | 6 | 20 | M 10 x 1.5 |
| **K- 07 15 13 71** | 63 mm | 5 | 6 | 20 | M 10 x 1.5 |
| **K- 07 15 13 72** | 63 mm | 10 | 6 | 20 | M 10 x 1.5 |
| **K- 07 15 13 73** | 63 mm | 15 | 6 | 20 | M 10 x 1.5 |
| **K- 07 15 13 74** | 63 mm | 20 | 6 | 20 | M 10 x 1.5 |
| **K- 07 15 13 75** | 63 mm | 25 | 6 | 20 | M 10 x 1.5 |
| **K- 07 15 13 76** | 63 mm | 30 | 6 | 20 | M 10 x 1.5 |

## Príslušenstvo

| | |
|---|---|
| **K-FUSSBEFESTIGUNG TYP LB 3** | Foot model, »LB« type |
| **K-FLANSCHBEFESTIGUNG TYP FA2** | Flange model, »FA« type |
| **K-SCHWENKGABELBEFESTIG CB 1** | Female hinge model, »CB« type |
| **K-GABELKOEPFE TYP Y SET 1** | Fork model, »Y« type (incl. threaded adapter) |
| **K-GELENKAUGEN TYP UNIT SET 1** | Rod eye model, »UNIT« type (incl. threaded adapter) |
| **K-SENSOREN CS1 KH MIT STECKER** | Sensors »CS1« type, cable with M8 plug |
| **K-SENSOREN CS1 KH OHNE STECKER** | Sensors »CS1« type, cable without plug |

*Napriek čo najstarostlivejšej kontrole nemôžeme vylúčiť chyby a nepreberáme žiadnu záruku za zahrnuté údaje.*