


K-BKR ELK 230 VAC, 50 HZ

Stainless steel ball valves with electric actuator 230 VAC, 50 Hz

HANSA FLEX

Vlastnosti

| | |
|------------------------------|---|
| Teplota média | -20 °C to +70 °C |
| Prevádzkový tlak | max. 63 bar (depending on temperature and nominal size) |
| Trvanie zapnutia | ED 30 % |
| Vlhkosť vzduchu | 30 % to 95 % |
| Spínacie polohy | Manually operated |
| trieda ochrany | IP 67 |
| Čas nastavenia | 13 sec. = 230 VAC, 50 Hz 15 sec. = 24 VDC |
| Teplota okolia | -20 °C až +60 °C |
| Montážna dĺžka | DIN 3203 - M3 |
| Montážna prírubá | ISO 5211 |
| Kryt | Aluminium, powder-coated |
| guľový kohút | Stainless steel 1.4401/1.4408 |
| Tesnenie gule | PTFE, glass fibre-reinforced |
| Tesnenie spínacieho hriadeľa | PTFE, glass fibre-reinforced |

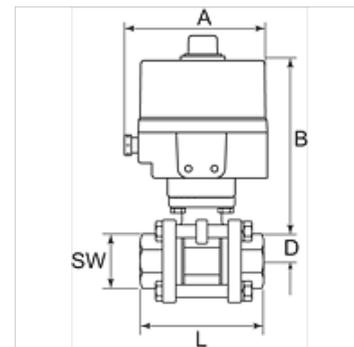

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Voltage range 230 VAC, 50 Hz or 24 VDC.
Reversible electric rotary actuator.

Výrobok

| Označenie | DN | Závit | A: (mm) | B (mm) | D: (mm) | D (mm) | SW (mm) |
|----------------|----|----------|------------|-----------|------------|-----------|------------|
| K- 07 30 20 58 | 15 | Rp 1/2 | 152,0 | 191,0 | 24,0 | 75,0 | 29 |
| K- 07 30 20 59 | 20 | Rp 3/4 | 152,0 | 195,0 | 26,0 | 80,0 | 35 |
| K- 07 30 20 60 | 25 | Rp 1 | 152,0 | 203,0 | 29,0 | 90,0 | 41 |
| K- 07 30 20 61 | 32 | Rp 1 1/4 | 152,0 | 209,0 | 36,0 | 110,0 | 50 |
| K- 07 30 20 62 | 40 | Rp 1 1/2 | 152,0 | 219,0 | 40,0 | 120,0 | 58 |
| K- 07 30 20 63 | 50 | Rp 2 | 152,0 | 275,0 | 48,0 | 140,0 | 72 |