


# K-L-STECKVER DREH AG OR 2

Male elbows, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## Vlastnosti

|                     |                      |
|---------------------|----------------------|
| Pracovný tlak       | Max. 16 bar          |
| Prevádzková teplota | -20 °C to +150 °C    |
| Materiál            | Mosadzný poniklovaný |
| Prítlačný krúžok    | Nickel-plated brass  |
| O-krúžok            | FKM (FPM)            |
| napínací krúžok     | Stainless steel      |

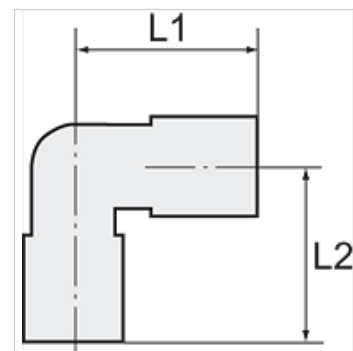

## Poznámka

Ďalšie údaje na vyžiadanie.

## Popis

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Výrobok

| Označenie      | Závit | pre vonkajší Ø hadice | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|-------|-----------------------|------------|------------|-------|
| K- 07 40 27 65 | M 5   | 4 mm                  | 18,0       | 14,5       | 9 mm  |
| K- 07 40 27 66 | M 5   | 6 mm                  | 21,0       | 14,5       | 9 mm  |
| K- 07 40 27 72 | G 1/8 | 4 mm                  | 20,0       | 20,0       | 13 mm |
| K- 07 40 27 73 | G 1/8 | 6 mm                  | 21,0       | 20,0       | 13 mm |
| K- 07 40 27 74 | G 1/8 | 8 mm                  | 24,0       | 20,0       | 13 mm |
| K- 07 40 27 69 | G 1/4 | 4 mm                  | 20,0       | 24,0       | 13 mm |
| K- 07 40 27 70 | G 1/4 | 6 mm                  | 21,0       | 24,0       | 13 mm |
| K- 07 40 27 71 | G 1/4 | 8 mm                  | 24,0       | 24,0       | 13 mm |
| K- 07 40 27 68 | G 1/4 | 10 mm                 | 27,0       | 24,0       | 16 mm |
| K- 07 40 47 86 | G 1/4 | 12 mm                 | 29,0       | 30,5       | 16 mm |
| K- 07 40 27 76 | G 3/8 | 8 mm                  | 24,0       | 25,5       | 13 mm |
| K- 07 40 27 75 | G 3/8 | 10 mm                 | 27,0       | 28,0       | 16 mm |
| K- 07 40 47 85 | G 1/2 | 12 mm                 | 29,0       | 33,5       | 20 mm |
| K- 07 40 27 67 | G 1/2 | 10 mm                 | 27,0       | 30,0       | 16 mm |
| K- 07 40 47 87 | G 3/8 | 12 mm                 | 29,0       | 28,5       | 20 mm |