


K-FI AK KOH PC-BEHAEL SI VARIOBLOC

Activated carbon filters with polycarbonate bowl and bowl guard

HANSA FLEX

Vlastnosti

| | |
|---------------------------|--|
| Vstupný tlak | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Teplota média | max. 50 °C |
| Teplota okolia | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl) |
| Kvalita vzduchu ISO 85731 | Class 1 dirt, class 1 oil |
| Obsah zvyškov oleja | 0,003 mg/m ³ |
| Meranie prietoku množstva | At P1 = 7 bar and pressure drop $\Delta p = 0,1$ bar |

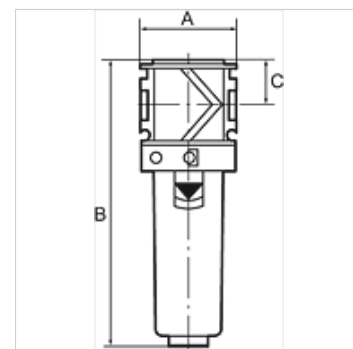

Poznámka

Activated carbon filters are also supplied with protective cage or metal container.

Ďalšie údaje na vyžiadanie.

Popis

The activated carbon filter absorbs oil vapour from the compressed air. The entering compressed air needs to be dry and free of contaminants (an upstream microfilter is strongly recommended).

Výrobok

| Označenie | Závit | Prietok (L/min) | A: (mm) | B | C (mm) |
|----------------|-------|-----------------|---------|----------|--------|
| K- 07 25 23 12 | G 1/4 | 800 | 48,0 | 142,0 mm | 22,0 |
| K- 07 25 23 13 | G 3/8 | 1000 | 48,0 | 142,0 mm | 22,0 |
| K- 07 25 23 14 | G 1/2 | 1200 | 70,0 | 193,0 mm | 26,0 |
| K- 07 25 23 15 | G 3/4 | 1300 | 70,0 | 193,0 mm | 26,0 |
| K- 07 25 23 16 | G 1 | 1300 | 124,0 | 193,0 mm | 26,0 |