


# K-DRV W RAENDEL SCHNV OR

Unidirectional flow control valves with incoming air restriction, adjustable with knurled screw, angled, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## Vlastnosti

Pracovný tlak	Max. 15 bar, coarse vacuum
Oblasť použitia	Air, vacuum
odporučené hadice	PU or PA (nylon)
Médiá	Compressed air and all gases or liquids that are compatible with the materials
Rozsah teplôt	-20 °C to +80 °C
Tesniaca plocha	Parallel version: O-ring in housing, Conical version: thread coating
Materiál	Plastic, Nickel plated brass
Prítláčny krúžok	Plastic

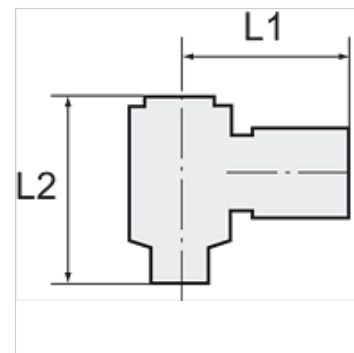

## Poznámka

Ďalšie údaje na vyžiadanie.

## Popis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Výrobok

Označenie	Závit	pre vonkajší Ø hadice	L1 (mm)	L2 min (mm)	L2 max (mm)	SW
K- 07 40 07 39	M 5	4 mm	20,0	29,0	31,9	8 mm
K- 07 40 07 40	M 5	6 mm	21,7	29,0	31,9	8 mm
K- 07 40 07 50	G 1/8	4 mm	22,3	37,8	44,0	10 mm
K- 07 40 07 51	G 1/8	6 mm	22,9	37,8	44,0	10 mm
K- 07 40 07 52	G 1/8	8 mm	25,3	37,8	44,0	10 mm
K- 07 40 07 49	G 1/8	10 mm	30,1	37,8	44,0	10 mm
K- 07 40 07 46	G 1/4	4 mm	24,0	44,0	51,0	14 mm
K- 07 40 07 47	G 1/4	6 mm	24,9	44,0	51,0	14 mm
K- 07 40 07 48	G 1/4	8 mm	28,4	44,0	51,0	14 mm
K- 07 40 07 44	G 1/4	10 mm	32,0	44,0	51,0	14 mm
K- 07 40 07 45	G 1/4	12 mm	32,0	44,0	51,0	14 mm
K- 07 40 07 55	G 3/8	8 mm	29,3	48,7	55,0	19 mm
K- 07 40 07 53	G 3/8	10 mm	32,5	48,7	55,0	19 mm
K- 07 40 07 54	G 3/8	12 mm	35,3	48,7	55,0	19 mm
K- 07 40 07 43	G 1/2	8 mm	32,3	53,0	59,2	24 mm
K- 07 40 07 41	G 1/2	10 mm	35,5	53,0	59,2	24 mm
K- 07 40 07 42	G 1/2	12 mm	36,3	53,0	59,2	24 mm