


K-DRV GEW V SCHLITZ

Unidirectional flow control valves, incoming air restriction (»V«), screw connection

HANSA FLEX

Vlastnosti

| | |
|--|------------------------------------|
| Prevádzkový tlak | max. 10 bar |
| Rozsah teplôt | 0 °C to +70 °C |
| dutá skrutka, otočné rameno, regulačná skrutka | Nickel-plated brass |
| vnútorné diely | Brass with a bare metal surface |
| Tesnenie hubice O-krúžok | NBR |
| tesnenia (nestratiteľné) | Polyamide (glass fibre-reinforced) |

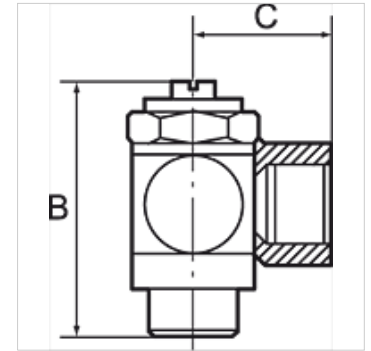

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

For fine regulation of a cylinder piston speed in the forward and return motion and precise control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece. Can be screwed directly onto the valve or cylinder to restrict the incoming air. Compact type of construction, also ideal where space is restricted.

Výrobok

| Označenie | Prípojka | C (mm) | Závit | SW | B (mm) |
|----------------|---------------------|-----------|-------|-------|-----------|
| K- 07 15 25 21 | M 5 female thread | 11,5 | M 5 | 8 mm | 24,5 |
| K- 07 15 05 70 | G 1/8 female thread | 16,0 | G 1/8 | 14 mm | 32,0 |
| K- 07 15 05 66 | G 1/4 female thread | 22,0 | G 1/4 | 17 mm | 40,0 |
| K- 07 15 25 22 | G 3/8 female thread | 26,0 | G 3/8 | 20 mm | 50,0 |