


K-DRG PNEU FERNGEST MULTIFIX

Pressure regulators with pneumatic remote control

HANSA FLEX

Vlastnosti

Vstupný tlak	Max. 16 bar
Výstupný tlak	corresponds to the set pressure of the pilot pressure regulator
Teplota média	max. 60 °C
Teplota okolia	Max. 60 °C
Tesniaci materiál	NBR
Kryt	Die-cast zinc, Aluminium for G 1 variant
Meranie prietoku množstva	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar
Prípojka riadiaci vzduch	G 1/8

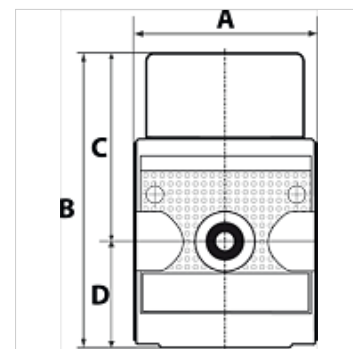

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Diaphragm pressure regulator, self-relieving, with pneumatic remote control. The pressure is set with a pilot pressure regulator (1:1 ratio). Either a standard or a precision pressure regulator can be used to regulate the pilot pressure.

Výrobok

Označenie	Závit	Prietok (L/min)	A: (mm)	B	C (mm)	D: (mm)
K- 07 25 19 56	G 1/4	1800	48,0	75,0 mm	48,0	27,0
K- 07 25 19 57	G 1/2	4800	69,0	94,0 mm	59,0	35,0
K- 07 25 19 58	G 1	12500	100,0	112,0 mm	60,0	52,0

Náhradné diely

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-VERSCHLEI-SATZ MULTIFIX	Set of wearing parts »multifix«