


# K-2-BK V DURCHG INFI

2/2-way ball valve Ø 20 mm - Ø 63 mm full bore

**HANSA FLEX**

## Vlastnosti

<b>Médiá</b>	Compressed air, vacuum, inert gases
<b>Prevádzkový tlak</b>	-0,99 bar - 15 bar
<b>Rozsah teplôt</b>	-20 °C to +80 °C
<b>tesnenie</b>	NBR
<b>Kryt</b>	Nickel-plated brass
<b>zvierací krúžok</b>	Stainless steel 1.4301
<b>matica</b>	Aluminium
<b>O-krúžok</b>	NBR
<b>poistný krúžok</b>	Technopolymer

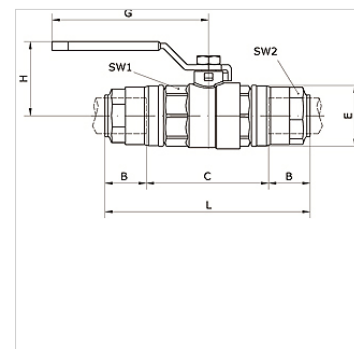

## Výrobok

Označenie	Vonkajší Ø rúrky	B (mm)	C (mm)	DN	E (mm)	G (mm)	V (mm)	D (mm)	SW1 (mm)	SW2 (mm)
K- 07 40 55 05	63 mm	57,5	38,0	59	94,0	240	111,5	232,0	89	75