


K-FI FEIN HANSA PRO

Compressed air fine filter, with manual/semi-automatic condensate drain, HANSA PRO

HANSA FLEX

Vlastnosti

| | |
|------------------------|--|
| Teplota média | -10 °C to +50 °C |
| Teplota okolia | -10 °C to +50 °C |
| Médiá | Tlakový vzduch |
| Konštrukcia | fiber filter |
| Spôsob upevnenia | Line mounting, mounting kit or wall mounting |
| Montážna poloha | Vertical, drain down |
| Jemnosť filtra | 0,01 µm |
| Účinnosť filtra | 99.999 % |
| Menovitý prietok G 1/2 | 750 l/min (P1 = 6 bar/Delta P = 0,1 bar) |
| Menovitý prietok G 3/8 | 750 l/min (P1 = 6 bar/Delta P = 0,1 bar) |
| Pe max | 16 bar |
| filtračná vložka | Borsilicate-Al |
| Kryt | PA66 |
| Obsah zvyškov oleja | 0,01 mg/m ³ |

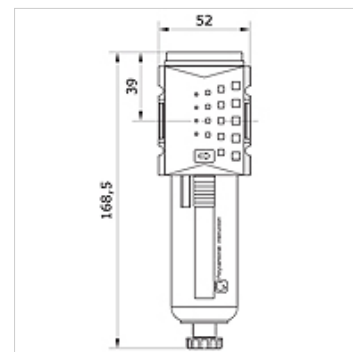

Výrobok

| Označenie | Prípojka | Zásobník | Veľkosť | Vypúšťanie kondenzátu |
|----------------|----------|------------------------------------|---------|-------------------------|
| K- 07 25 21 28 | G 3/8 i | polycarbonate with protective cage | 2 | manual / semi-automatic |
| K- 07 25 21 29 | G 1/2 i | polycarbonate with protective cage | 2 | manual / semi-automatic |
| K- 07 25 21 30 | G 3/8 i | zinc with visual display | 2 | manual / semi-automatic |
| K- 07 25 21 31 | G 1/2 i | zinc with visual display | 2 | manual / semi-automatic |