


# K-T-RINGSTUECK

T-ring nipples

**HANSA FLEX**

## Vlastnosti

|                     |                      |
|---------------------|----------------------|
| Pracovný tlak       | Max. 16 bar          |
| Prevádzková teplota | -20 °C to +70 °C     |
| Materiál            | Mosadzný poniklovaný |
| Prítláčny krúžok    | Hostaform            |
| napínací krúžok     | Stainless steel      |

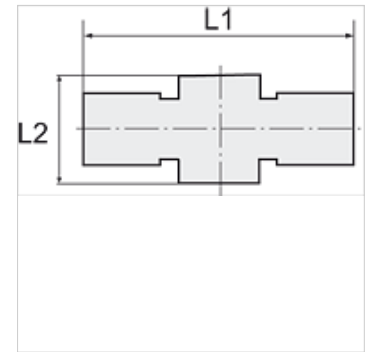

## Poznámka

Ďalšie údaje na vyžiadanie.

## Popis

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Výrobok

| Označenie      | pre dutú skrutku | pre vonkajší Ø hadice | L1<br>(mm) | L2<br>(mm) |
|----------------|------------------|-----------------------|------------|------------|
| K- 07 40 26 93 | M 5              | 4 mm                  | 36,0       | 9,0        |
| K- 07 40 26 97 | G 1/8            | 4 mm                  | 42,0       | 15,0       |
| K- 07 40 26 98 | G 1/8            | 6 mm                  | 46,0       | 15,0       |
| K- 07 40 26 99 | G 1/8            | 8 mm                  | 49,0       | 15,0       |
| K- 07 40 26 95 | G 1/4            | 6 mm                  | 48,0       | 17,0       |
| K- 07 40 26 96 | G 1/4            | 8 mm                  | 52,0       | 17,0       |
| K- 07 40 26 94 | G 1/4            | 10 mm                 | 52,0       | 17,0       |
| K- 07 40 27 02 | G 3/8            | 8 mm                  | 54,0       | 20,0       |
| K- 07 40 27 00 | G 3/8            | 10 mm                 | 56,0       | 20,0       |
| K- 07 40 27 01 | G 3/8            | 12 mm                 | 58,0       | 20,0       |