


K-W90 STUECK IG IG MS NI

90° elbows, female/female

HANSA FLEX

Vlastnosti

| | |
|---------------------|------------------------------|
| Prevádzkový tlak | 60 bar |
| Prevádzková teplota | Max. 150 °C |
| vnútorný závit | Parallel to DIN EN ISO 228-1 |
| Materiál | Mosadzný poniklovaný |

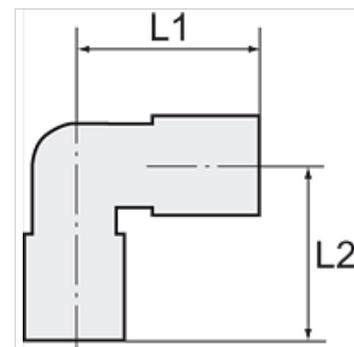

Poznámka

Ďalšie údaje na vyžiadanie.

Výrobok

| Označenie | Závit | L1 (mm) | L2 (mm) | SW |
|----------------|-------|------------|------------|-------|
| K- 07 40 48 90 | M 5 | 11,0 | 11,0 | 9 mm |
| K- 07 40 10 86 | G 1/8 | 21,0 | 21,0 | 10 mm |
| K- 07 40 10 87 | G 1/4 | 25,5 | 25,5 | 13 mm |
| K- 07 40 10 88 | G 3/8 | 28,0 | 28,0 | 17 mm |
| K- 07 40 10 89 | G 1/2 | 33,5 | 33,5 | 21 mm |
| K- 07 40 10 96 | G 3/4 | 36,5 | 36,5 | 25 mm |
| K- 07 40 10 97 | G 1 | 45,0 | 45,0 | 30 mm |