


Vlastnosti

| | |
|------------------|-----------------------|
| Prevádzkový tlak | do 500 bar |
| Teplota min. | -40 °C |
| Teplota max. | 120 °C |
| Médiá | Minerálne oleje |
| Materiál | Polyuretán 93 Shore A |

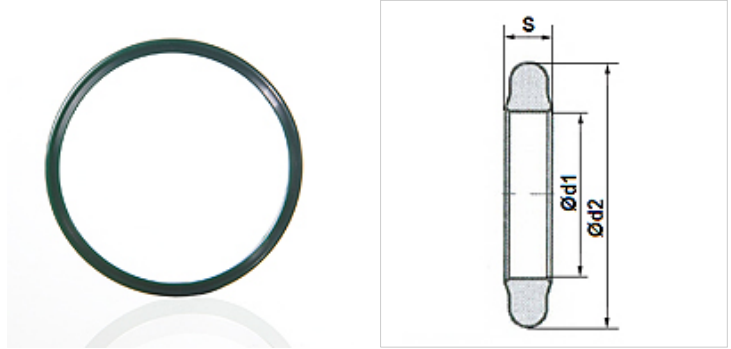

Výrobok

| Označenie | Veľkosť príruby | d1 (mm) | d2 (mm) | S (mm) |
|-----------|-----------------|------------|------------|-----------|
| FS-08 | 1/2" | 18,40 | 25,40 | 3,53 |
| FS-12 | 3/4" | 24,80 | 31,80 | 3,53 |
| FS-16 | 1" | 32,70 | 39,70 | 3,53 |
| FS-20 | 1.1/4" | 37,50 | 44,50 | 3,53 |
| FS-24 | 1.1/2" | 46,80 | 53,80 | 3,53 |
| FS-32 | 2" | 56,40 | 63,40 | 3,53 |
| FS-40 | 2.1/2" | 69,40 | 76,20 | 3,53 |
| FS-48 | 3" | 85,30 | 91,90 | 3,53 |