


# WFG JIC (6000 PSI)

Adapter za spojko SAE, kovani

**HANSA FLEX**

## Lastnosti

Tlačna vrsta	6000 psi
Standard	SAE J 518 C ISO 6162
Način izdelave-dodatek	kovano
Oblika izdelave	koleno 90°
Način izdelave	adapter SAE-prirobnica
Obseg dobave	samo prirobnica
Material:	S355J2G3 (ST52.3)
Zaščita površine	galvanično prevlečeno

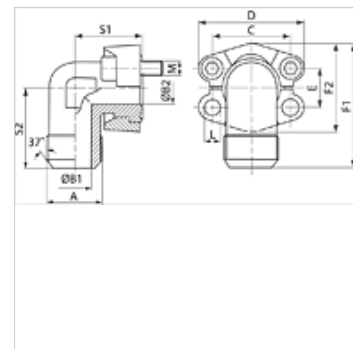

## Navodilo

Navedeni najvišji obratovalni tlak velja za prirobnico! Dejanski obratovalni tlak se določa na osnovi cevi (debeline stene) in na osnovi kvalitete cevi!

Priporočeni vijaki so navedeni v stolpcih M (metr) ali M (unc).

## Artikel

Opis	PB 10.9 (bar)	Velikost	A	B1 (mm)	B2 (mm)	E (mm)	F1 (mm)	S1 (mm)	S2 (mm)	L (mm)	M metr.	M unc
WFG 6001 JIC 3/4	400	1/2"	UNF 3/4"	9,9	13	18,2	61,6	39	38	8,7	M 8 x 30	5/16" x 1.1/4"
WFG 6001 JIC 7/8	400	1/2"	UNF 7/8"	12,3	13	18,2	61,6	39	38	8,7	M 8 x 35	5/16" x 1.1/4"
WFG 6002 JIC 1 1/16	400	3/4"	UNF 1,1/16"	15,5	17	23,8	78,0	48	48	10,7	M 10 x 35	3/8" x 1.1/2"
WFG 6002 JIC 1 5/16	400	3/4"	UN 1,5/16"	21,5	17	23,8	78,0	48	48	10,7	M 10 x 35	3/8" x 1.1/2"
WFG 6002 JIC 7/8	400	3/4"	UNF 7/8"	12,3	17	23,8	78,0	48	48	10,7	M 10 x 35	3/8" x 1.1/2"
WFG 6003 JIC 1 1/16	400	1"	UNF 1,1/16"	15,5	24	27,8	99,0	60	60	*1	M 12 x 45	7/16" x 1.3/4"
WFG 6003 JIC 1 5/16	400	1"	UN 1,5/16"	21,5	24	27,8	99,0	60	60	*1	M 12 x 45	7/16" x 1.3/4"
WFG 6003 JIC 1 5/8	400	1"	UN 1,5/8"	27,5	24	27,8	99,0	60	60	*1	M 12 x 45	7/16" x 1.1/2"
WFG 6004 JIC 1 5/16	400	1.1/4"	UN 1,5/16"	21,5	30	31,8	115,5	68	68	*2	M 14 x 50	1/2" x 1.3/4"
WFG 6004 JIC 1 5/8	400	1.1/4"	UN 1,5/8"	27,5	30	31,8	115,5	68	68	*2	M 14 x 50	1/2" x 1.3/4"
WFG 6004 JIC 1 7/8	400	1.1/4"	UN 1,7/8"	33,0	30	31,8	115,5	68	68	*2	M 14 x 50	1/2" x 1.3/4"
WFG 6005 JIC 1 5/8	400	1.1/2"	UN 1,5/8"	27,5	32	36,5	133,0	76	76	17,0	M 16 x 55	5/8" x 2"
WFG 6005 JIC 1 7/8	400	1.1/2"	UN 1,7/8"	33,0	32	36,5	133,0	76	76	17,0	M 16 x 55	5/8" x 2"

PN = nazivni tlak PB = maks. obratovalni tlak

\*1) = izbirno 12,0 ali 12,5 - \*2) = izbirno 13,5 ali 14,5

## Variante izdelka

WFG JIC U (3000 / 6000 PSI) Adapter za spojko SAE, kovani, z 2 polprirobnicama, kompletom vijakov in O-tesnilom

WFG JIC M (3000 / 6000 PSI) Adapter za spojko SAE, kovani, z 2 polprirobnicama, kompletom vijakov in O-tesnilom