


# WFG JIC U (3000 / 6000 PSI)

Adapter za spojko SAE, kovano

**HANSA FLEX**

## Lastnosti

<b>Standard</b>	SAE J 518 C ISO 6162
<b>Način izdelave-dodatek</b>	kovano
<b>Oblika izdelave</b>	koleno 90°
<b>Način izdelave</b>	adapter SAE-prirobnica
<b>Obseg dobave</b>	z 2 polprirobnicama, kompletom vijakov in O-tesnilom
<b>Material:</b>	S355J2G3 (ST52.3)
<b>Zaščita površine</b>	galvanično prevlečeno

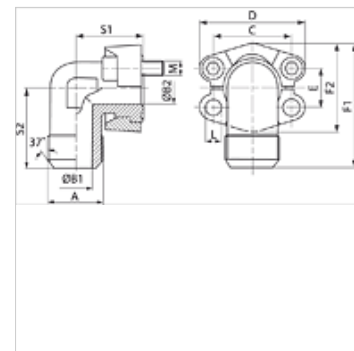

## Navodilo

Navedeni najvišji obratovalni tlak velja za prirobnico! Dejanski obratovalni tlak se določa na osnovi cevi (debeline stene) in na osnovi kvalitete cevi!

## Artikel

Opis	Tlačna vrsta	PB 10.9 (bar)	Velikost A	B1	B2	C	D	E	F1	F2	S1	S2	L	Vijaki
				(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
WFG 3001 JIC 3/4 U	3000 PSI	350	1/2" UNF 3/4"	9,9	13	38,1	54	17,5	60,8	45,6	38	38	8,7	(4 x) UNC 5/16 x 1.1/4
WFG 3001 JIC 7/8 U	3000 PSI	350	1/2" UNF 7/8"	12,3	13	38,1	54	17,5	60,8	45,6	38	38	8,7	(4 x) UNC 5/16 x 1.1/4
WFG 3002 JIC 1 1/16 U	3000 PSI	350	3/4" UNF 1,1/16"	15,5	19	47,6	65	22,2	70,9	51,8	42	45	10,7	(4 x) UNC 3/8 x 1.1/2
WFG 3002 JIC 1 5/16 U	3000 PSI	350	3/4" UN 1,5/16"	21,5	19	47,6	65	22,2	70,9	51,8	42	45	10,7	(4 x) UNC 3/8 x 1.1/2
WFG 3002 JIC 7/8 U	3000 PSI	350	3/4" UNF 7/8"	12,3	19	47,6	65	22,2	70,9	51,8	42	45	10,7	(4 x) UNC 3/8 x 1.1/2
WFG 3003 JIC 1 1/16 U	3000 PSI	315	1" UNF 1,1/16"	15,5	24	52,4	70	26,2	79,2	58,4	45	50	10,7	(4 x) UNC 3/8 x 1.1/2
WFG 3003 JIC 1 5/16 U	3000 PSI	315	1" UN 1,5/16"	21,5	24	52,4	70	26,2	79,2	58,4	45	50	10,7	(4 x) UNC 3/8 x 1.1/2
WFG 3003 JIC 1 5/8 U	3000 PSI	315	1" UN 1,5/8"	27,5	24	52,4	70	26,2	79,2	58,4	45	50	10,7	(4 x) UNC 3/8 x 1.1/2
WFG 3004 JIC 1 5/16 U	3000 PSI	250	1.1/4" UN 1,5/16"	21,5	31	58,7	79	30,2	85,3	72,6	50	59	*1	(4 x) UNC 7/16 x 1.1/2
WFG 3004 JIC 1 5/8 U	3000 PSI	250	1.1/4" UN 1,5/8"	27,5	31	58,7	79	30,2	85,3	72,6	50	59	*1	(4 x) UNC 7/16 x 1.1/2
WFG 3005 JIC 1 5/8 U	3000 PSI	200	1.1/2" UN 1,5/8"	27,5	38	69,9	94	35,7	117,1	82,2	76	76	13,5	(4 x) UNC 1/2 x 1,3/4
WFG 3005 JIC 1 7/8 U	3000 PSI	200	1.1/2" UN 1,7/8"	33,0	38	69,9	94	35,7	117,1	82,2	76	76	13,5	(4 x) UNC 1/2 x 1,3/4
WFG 6001 JIC 3/4 U	6000 PSI	400	1/2" UNF 3/4"	9,9	13	40,5	56	18,2	61,6	47,2	39	38	8,7	(4 x) UNC 5/16 x 1.1/4
WFG 6001 JIC 7/8 U	6000 PSI	400	1/2" UNF 7/8"	12,3	13	40,5	56	18,2	61,6	47,2	39	38	8,7	(4 x) UNC 5/16 x 1.1/4
WFG 6002 JIC 1 1/16 U	6000 PSI	400	3/4" UNF 1,1/16"	15,5	17	50,8	71	23,8	78,0	60,0	48	48	10,7	(4 x) UNC 3/8 x 1.1/2
WFG 6002 JIC 1 5/16 U	6000 PSI	400	3/4" UN 1,5/16"	21,5	17	50,8	71	23,8	78,0	60,0	48	48	10,7	(4 x) UNC 3/8 x 1.1/2
WFG 6002 JIC 7/8 U	6000 PSI	400	3/4" UNF 7/8"	12,3	17	50,8	71	23,8	78,0	60,0	48	48	10,7	(4 x) UNC 3/8 x 1.1/2
WFG 6003 JIC 1 1/16 U	6000 PSI	400	1" UNF 1,1/16"	15,5	24	57,2	81	27,8	99,0	69,9	60	60	*2	(4 x) UNC 7/16 x 1,3/4
WFG 6003 JIC 1 5/16 U	6000 PSI	400	1" UN 1,5/16"	21,5	24	57,2	81	27,8	99,0	69,9	60	60	*2	(4 x) UNC 7/16 x 1,3/4
WFG 6003 JIC 1 5/8 U	6000 PSI	400	1" UN 1,5/8"	27,5	24	57,2	81	27,8	99,0	69,9	60	60	*2	(4 x) UNC 7/16 x 1,3/4
WFG 6004 JIC 1 5/16 U	6000 PSI	400	1.1/4" UN 1,5/16"	21,5	30	66,7	95	31,8	115,5	77,2	68	68	*3	(4 x) UNC 1/2 x 1,3/4
WFG 6004 JIC 1 5/8 U	6000 PSI	400	1.1/4" UN 1,5/8"	27,5	30	66,7	95	31,8	115,5	77,2	68	68	*3	(4 x) UNC 1/2 x 1,3/4
WFG 6004 JIC 1 7/8 U	6000 PSI	400	1.1/4" UN 1,7/8"	33,0	30	66,7	95	31,8	115,5	77,2	68	68	*3	(4 x) UNC 1/2 x 1,3/4
WFG 6005 JIC 1 5/8 U	6000 PSI	400	1.1/2" UN 1,5/8"	27,5	32	79,4	113	36,5	133,0	95,0	76	76	17,0	(4 x) UNC 5 / 8 x 2
WFG 6005 JIC 1 7/8 U	6000 PSI	400	1.1/2" UN 1,7/8"	33,0	32	79,4	113	36,5	133,0	95,0	76	76	17,0	(4 x) UNC 5 / 8 x 2

serija: LL = zelo lahko L = lahko S = težko - Ø = zunanji premer cevi - PN = nazivni tlak PB = maks. obratovalni tlak

\*1) = po izbiri 10,5, 12,0 ali 12,5 - \*2) = izbirno 12,0 ali 12,5 - \*3) = izbirno 13,5 ali 14,5

## Variante izdelka

WFG JIC (6000 PSI)	Adapter za spojko SAE, kovano, samo prirobnica
WFG JIC M (3000 / 6000 PSI)	Adapter za spojko SAE, kovano, z 2 polprirobnicama, kompletom vijakov in O-tesnilom