


Lastnosti

| | |
|-------------------------|--------------------------------|
| Priključek 1 | matični navoj BSP |
| Oblika tesnila 1 | 60° zunanji konus |
| Priključek 2 | notranji navoj BSP cilindričen |
| Oblika tesnila 2 | ploščato tesnjenje |
| Način izdelave | navojni veznik |
| Oblika izdelave | ravno |
| Material: | jeklo |
| Zaščita površine | galvanično prevlečeno |

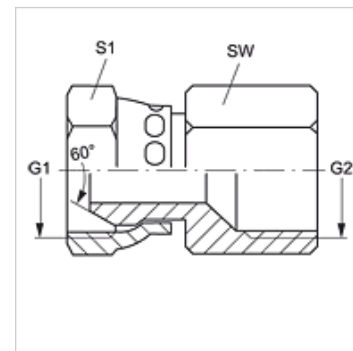

Artikel

| Opis | G1 + G2 | SW (mm) | S1 |
|-------------------|--------------|------------|----|
| G AB 02 IR | G 1/8" -28 | 14 | 14 |
| G AB 04 IR | G 1/4" -19 | 17 | 19 |
| G AB 06 IR | G 3/8" -19 | 22 | 22 |
| G AB 08 IR | G 1/2" -14 | 27 | 27 |
| G AB 12 IR | G 3/4" -14 | 32 | 32 |
| G AB 16 IR | G 1" -11 | 43 | 41 |
| G AB 20 IR | G 1,1/4" -11 | 50 | 50 |
| G AB 24 IR | G 1,1/2" -11 | 60 | 60 |

SW, S1, S2 = ključna širina