


G HB IN VA

Navojni cevni nastavek

Lastnosti

| | |
|-------------------------|-------------------------------|
| Priključek 1 | zunanji navoj cilindrični BSP |
| Oblika tesnila 1 | 60° notranji konus |
| Priključek 2 | notranji navoj NPT |
| Oblika tesnila 2 | tesni navoje |
| Način izdelave | navojni cevni nastavek |
| Oblika izdelave | ravno |
| Material: | nerjavno jeklo |

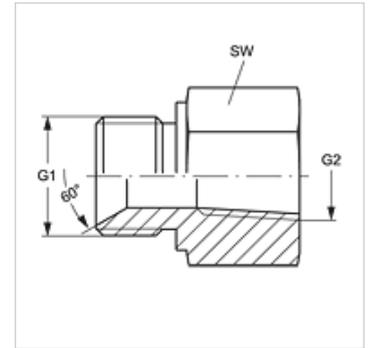

Artikel

| Opis | G1 | G2 | SW (mm) |
|------------------|--------------|------------------|------------|
| G HB 02 IN VA | G 1/8" -28 | 1/8" -27 NPT | 14 |
| G HB 02 IN 04 VA | G 1/8" -28 | 1/4" -18 NPT | 19 |
| G HB 04 IN 02 VA | G 1/4" -19 | 1/8" -27 NPT | 19 |
| G HB 04 IN VA | G 1/4" -19 | 1/4" -18 NPT | 19 |
| G HB 04 IN 06 VA | G 1/4" -19 | 3/8" -18 NPT | 24 |
| G HB 04 IN 08 VA | G 1/4" -19 | 1/2" -14 NPT | 27 |
| G HB 06 IN 04 VA | G 3/8" -19 | 1/4" -18 NPT | 22 |
| G HB 06 IN VA | G 3/8" -19 | 3/8" -18 NPT | 24 |
| G HB 06 IN 08 VA | G 3/8" -19 | 1/2" -14 NPT | 27 |
| G HB 08 IN 04 VA | G 1/2" -14 | 1/4" -18 NPT | 27 |
| G HB 08 IN 06 VA | G 1/2" -14 | 3/8" -18 NPT | 27 |
| G HB 08 IN VA | G 1/2" -14 | 1/2" -14 NPT | 27 |
| G HB 08 IN 12 VA | G 1/2" -14 | 3/4" -14 NPT | 36 |
| G HB 12 IN 06 VA | G 3/4" -14 | 3/8" -18 NPT | 32 |
| G HB 12 IN 08 VA | G 3/4" -14 | 1/2" -14 NPT | 32 |
| G HB 12 IN VA | G 3/4" -14 | 3/4" -14 NPT | 36 |
| G HB 12 IN 16 VA | G 3/4" -14 | 1" -11,5 NPT | 36 |
| G HB 16 IN 08 VA | G 1" -11 | 1/2" -14 NPT | 41 |
| G HB 16 IN 12 VA | G 1" -11 | 3/4" -14 NPT | 41 |
| G HB 16 IN VA | G 1" -11 | 1" -11,5 NPT | 41 |
| G HB 20 IN 16 VA | G 1,1/4" -11 | 1" -11,5 NPT | 50 |
| G HB 20 IN VA | G 1,1/4" -11 | 1,1/4" -11,5 NPT | 50 |
| G HB 24 IN VA | G 1,1/2" -11 | 1,1/2" -11,5 NPT | 55 |
| G HB 32 IN VA | G 2" -11 | 2" -11,5 NPT | 60 |

SW = ključna širina

Variante izdelka

G HB IN Navojni cevni nastavek, jeklo