

ND AB

Vtični priključek, DKR

HANSA FLEX

Lastnosti

Priključek 1 zunanji navoj cilindrični BSP


Oblika tesnila 1 60° zunanji konus

kratica DKR

Standard ISO 8434-6
BS 5200

Material: jeklo

Zaščita površine galvanično prevlečeno

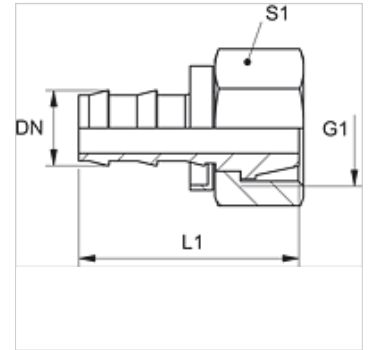

Navodilo

Nepoškodovane cevne nastavke se lahko ponovno uporabi.

Artikel

Opis	DN	Size	Palec	G1	L1 (mm)	S1
ND 06 AB	6	4	1/4"	G 1/4" -19	33,0	17
ND 10 AB	10	6	3/8"	G 3/8" -19	37,0	19
ND 13 AB	12	8	1/2"	G 1/2" -14	42,0	27
ND 16 AB	16	10	5/8"	G 5/8" -14	53,0	30
ND 20 AB	19	12	3/4"	G 3/4" -14	58,0	32
ND 25 AB	25	16	1"	G 1" -11	57,0	41

Pribor

ND ASR GE, RO, BL Omejevalni obroč za vtični cevni priključek