

# ND HB

Vtični priključek, AGR

**HANSA FLEX**

## Lastnosti

**Priključek 1** zunanji navoj cilindrični BSP


**Oblika tesnila 1** 60° notranji konus

**kratica** AGR

**Standard** ISO 8434-6  
BS 5200

**Material:** jeklo

**Zaščita površine** galvanično prevlečeno

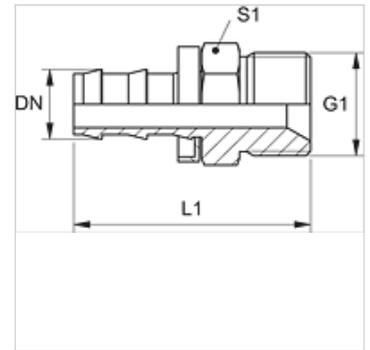

## Navodilo

Nepoškodovane cevne nastavke se lahko ponovno uporabi.

## Artikel

| Opis        | DN | Size | Palec | G1         | L1<br>(mm) | S1 |
|-------------|----|------|-------|------------|------------|----|
| ND 06 HB 02 | 6  | 4    | 1/4"  | G 1/8" -28 | 36,0       | 17 |
| ND 06 HB    | 6  | 4    | 1/4"  | G 1/4" -19 | 41,0       | 19 |
| ND 10 HB 06 | 10 | 6    | 3/8"  | G 1/4" -19 | 44,0       | 19 |
| ND 10 HB    | 10 | 6    | 3/8"  | G 3/8" -19 | 45,0       | 22 |
| ND 13 HB    | 12 | 8    | 1/2"  | G 1/2" -14 | 53,0       | 27 |
| ND 16 HB 13 | 16 | 10   | 5/8"  | G 1/2" -14 | -          | -  |
| ND 16 HB    | 16 | 10   | 5/8"  | G 5/8" -14 | 65,0       | 30 |
| ND 20 HB    | 19 | 12   | 3/4"  | G 3/4" -14 | 65,0       | 32 |

## Pribor

ND ASR GE, RO, BL Omejevalni obroč za vtični cevni priključek