


# SF O-RING PU

Tesnilni obroč za priključek prirobnice SAE

**HANSA FLEX**

## Lastnosti

|                  |                       |
|------------------|-----------------------|
| Standard         | SAE J518              |
| Temperatura min. | -30 °C                |
| Temperatura max. | 100 °C                |
| Material:        | poliuretan 93 Shore A |

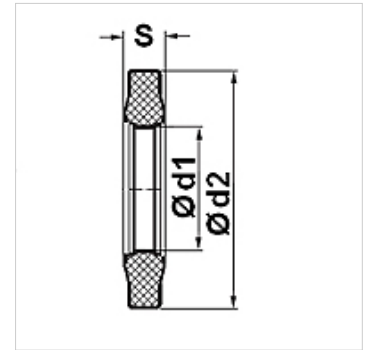

## Opis

dvignjeno tesnenje zaradi dodatnega tesnilnega roba.

## Artikel

| Opis           | DN* | Size | Palec  | Ø d1<br>(mm) | Ø d2<br>(mm) | S<br>(mm) |
|----------------|-----|------|--------|--------------|--------------|-----------|
| SF ORING 13 PU | 12  | 8    | 1/2"   | 18,40        | 25,40        | 3,45      |
| SF ORING 20 PU | 19  | 12   | 3/4"   | 24,80        | 31,80        | 3,45      |
| SF ORING 25 PU | 25  | 16   | 1"     | 32,70        | 39,70        | 3,45      |
| SF ORING 32 PU | 31  | 20   | 1.1/4" | 37,50        | 44,50        | 3,45      |
| SF ORING 40 PU | 38  | 24   | 1.1/2" | 46,80        | 53,80        | 3,45      |
| SF ORING 50 PU | 51  | 32   | 2"     | 56,40        | 63,40        | 3,45      |

## Variante izdelka

SF O-RING V