

## Lastnosti


**Priključek 1** zunanji navoj cilindrični BSP

**Oblika tesnila 1** 60° notranji konus

**kratica** AGR

**Standard** ISO 228-1  
ISO 8434-6  
BS 5200

**Material:** med

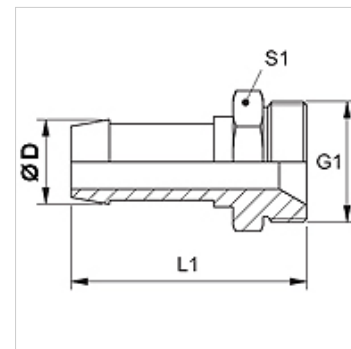

## Navodilo

Ustrezni okov izbrati v skladu z vrsto cevi.

## Artikel

| Opis         | DN | Size | Palec | Ø D (mm) | G1         |
|--------------|----|------|-------|----------|------------|
| SIN 03 HB 04 | 3  | 2    | 1/8"  | 5,0      | G 1/8" -28 |
| SIN 04 HB 06 | 4  | 3    | 3/16" | 6,0      | G 1/4" -19 |
| SIN 06 HB    | 6  | 4    | 1/4"  | 8,0      | G 1/4" -19 |
| SIN 06 HB 10 | 6  | 4    | 1/4"  | 8,0      | G 3/8" -19 |
| SIN 08 HB 10 | 8  | 5    | 5/16" | 10,0     | G 3/8" -19 |
| SIN 10 HB 13 | 10 | 6    | 3/8"  | 12,0     | G 1/2" -14 |
| SIN 13 HB    | 12 | 8    | 1/2"  | 15,0     | G 1/2" -14 |