


TR B

Vstavni cevni priključek, RGN

HANSA FLEX

Lastnosti

| | |
|-------------------------|-----------------------------|
| Priključek 1 | očesni obroč, metrični |
| Oblika tesnila 1 | tesnjeno z bakrenim obročem |
| kratica | RGN |
| Standard | DIN 7642 |
| Material: | jeklo |
| Zaščita površine | galvanično prevlečeno |

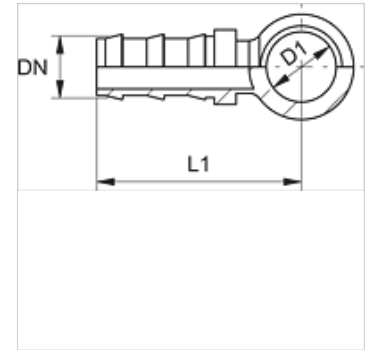

Artikel

| Opis | DN | Size | Palec | D1 (mm) | L1 (mm) |
|------------|----|------|-------|------------|------------|
| TR 04 B 02 | 5 | 3 | 3/16" | 8 | 24 |
| TR 04 B | 5 | 3 | 3/16" | 10 | 26 |
| TR 06 B 04 | 6 | 4 | 1/4" | 10 | 26 |
| TR 06 B | 6 | 4 | 1/4" | 12 | 28 |
| TR 06 B 08 | 6 | 4 | 1/4" | 14 | 28 |
| TR 06 B 10 | 6 | 4 | 1/4" | 16 | 30 |
| TR 08 B 06 | 8 | 5 | 5/16" | 12 | 34 |
| TR 08 B | 8 | 5 | 5/16" | 14 | 34 |
| TR 08 B 10 | 8 | 5 | 5/16" | 16 | 36 |
| TR 10 B 08 | 10 | 6 | 3/8" | 14 | 34 |
| TR 10 B | 10 | 6 | 3/8" | 16 | 36 |