

TR HL

Udarni priključek, CEL

HANSA FLEX

Lastnosti


Priključek 1 metrični zunanji navoj, cilindrični

Oblika tesnila 1 24° notranji konus

Standard ISO 8434-1

Material: jeklo

Zaščita površine galvanično prevlečeno

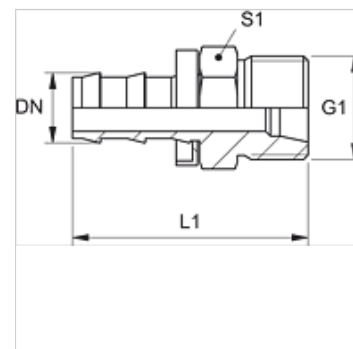

Artikel

| Opis | DN | Size | Palec | G1 | za zunanji Ø cevi (mm) | L1 (mm) |
|-------------|----|------|-------|------------|---------------------------|------------|
| TR 04 HL | 5 | 3 | 3/16" | M 12 x 1,5 | 6 | 30 |
| TR 06 HL | 6 | 4 | 1/4" | M 14 x 1,5 | 8 | 31 |
| TR 08 HL 06 | 8 | 5 | 5/16" | M 14 x 1,5 | 8 | 38 |
| TR 08 HL | 8 | 5 | 5/16" | M 16 x 1,5 | 10 | 38 |
| TR 10 HL 08 | 10 | 6 | 3/8" | M 16 x 1,5 | 10 | 38 |
| TR 10 HL | 10 | 6 | 3/8" | M 18 x 1,5 | 12 | 39 |
| TR 13 HL | 12 | 8 | 1/2" | M 22 x 1,5 | 15 | 52 |