

# K HB

Veznik, izvedba na križ

**HANSA FLEX**

## Lastnosti

**Priključek 1 - 4** zunanji navoj cilindrični BSP


**Oblika tesnila 1 - 4** 60° notranji konus

**Način izdelave** vezniki

**Oblika izdelave** izvedba K

**Material:** jeklo

**Zaščita površine** galvanično prevlečeno

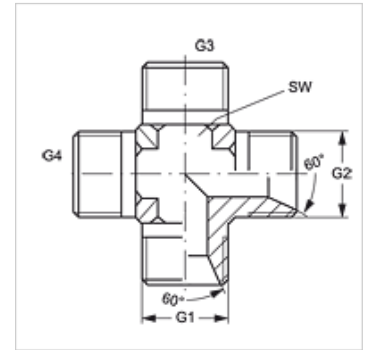

## Artikel

Opis	G1 - G4	SW (mm)
K HB 02	G 1/8" -28	11
K HB 04	G 1/4" -19	14
K HB 06	G 3/8" -19	19
K HB 08	G 1/2" -14	22
K HB 10	G 5/8" -14	22
K HB 12	G 3/4" -14	27
K HB 16	G 1" -11	33
K HB 20	G 1,1/4" -11	41
K HB 24	G 1,1/2" -11	48
K HB 32	G 2" -11	64

SW = ključna širina

## Variante izdelka

**K HB VA** Veznik, izvedba na križ, nerjavno jeklo