


# HFM MKR

Priključek za merjenje, serija M16 x 2

**HANSA FLEX**

## Lastnosti

|                  |   |
|------------------|---|
| Priključek 1     | zunanji navoj cilindrični BSP               |
| Oblika tesnila 1 | izvedba B                                   |
| Priključek 2     | priključek za merjenje M 16 x 2             |
| Način izdelave   | Screw-in socket with measurement connection |
| Obseg dobave     | z zaporno kapo                              |
| Temperatura min. | -25 °C                                      |
| Temperatura max. | 100 °C                                      |
| Material:        | jeklo                                       |
| Zaščita površine | galvanično prevlečeno                       |

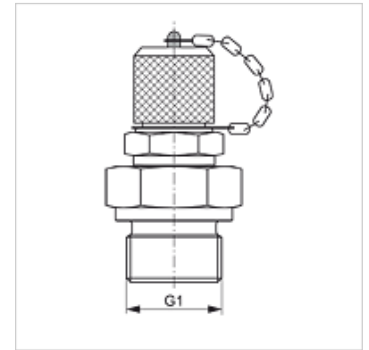

## Artikel

| Opis          | G1           | najv. obratovalni tlak<br>(bar) |
|---------------|--------------|---------------------------------|
| HFM MKR 1/8   | G 1/8" -28   | 400                             |
| HFM MKR 1/4   | G 1/4" -19   | 630                             |
| HFM MKR 3/8   | G 3/8" -19   | 630                             |
| HFM MKR 1/2   | G 1/2" -14   | 630                             |
| HFM MKR 3/4   | G 3/4" -14   | 400                             |
| HFM MKR 1     | G 1" -11     | 400                             |
| HFM MKR 1 1/4 | G 1,1/4" -11 | 250                             |
| HFM MKR 1 1/2 | G 1,1/2" -11 | 250                             |

## Nadomestni deli

HFM VK Zaporna kapa