


HFM MKR ED VA

Priključek za merjenje, serija M16 x 2

HANSA FLEX

Lastnosti

| | |
|------------------|---|
| Priključek 1 | zunanji navoj cilindrični BSP |
| Oblika tesnila 1 | izvedba E |
| Priključek 2 | priključek za merjenje M 16 x 2 |
| Način izdelave | Screw-in socket with measurement connection |
| Obseg dobave | z zaporno kapo |
| Temperatura min. | -20 °C |
| Temperatura max. | 100 °C |
| Material: | nerjavno jeklo |

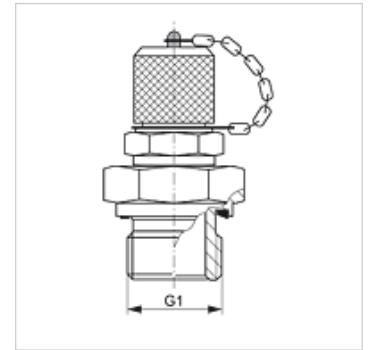

Artikel

| Opis | G1 | najv. obratovalni tlak (bar) |
|-------------------|------------|------------------------------|
| HFM MKR 1/8 ED VA | G 1/8" -28 | 630 |
| HFM MKR 1/4 ED VA | G 1/4" -19 | 630 |
| HFM MKR 3/8 ED VA | G 3/8" -19 | 630 |
| HFM MKR 1/2 ED VA | G 1/2" -14 | 630 |

Variante izdelka

| | |
|------------|---|
| HFM MKR ED | Priključek za merjenje, serija M16 x 2, jeklo |
|------------|---|