


### Lastnosti

Območje uporabe	Priključna armatura za kovinske cevi
Prikluček 1	navojska puša s cilindričnim colskim notranjim navojem
Standard	DIN EN 10226 / ISO 7-1
Oblika izdelave	ravno
Material:	temprana litina
Uporaba	lotana izvedba, obstojna do 200 °C

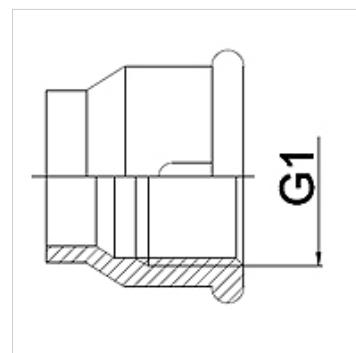

### Navodilo

The specified working pressure PN(bar) relates to the working temperature of -20 °C to 120 °C. At working temperature of 120 °C to 200 °C the working pressure PN (bar) reduces to 22,7 bar.

### Navodila za naročanje

Druge izvedbe na zahtevo

### Artikel

Opis	DN	PN (bar)	G1
WA 004 IR	4	25	Rp 1/8"
WA 006 IR	6	25	Rp 1/4"
WA 010 IR	10	25	Rp 3/8"
WA 013 IR	13	25	Rp 1/2"
WA 020 IR	20	25	Rp 3/4"
WA 025 IR	25	25	Rp 1"
WA 032 IR	32	25	Rp 1 1/4"
WA 040 IR	40	25	Rp 1 1/2"
WA 050 IR	50	25	Rp 2"
WA 065 IR	65	25	Rp 2 1/2"
WA 080 IR	80	25	Rp 3"
WA 100 IR	100	25	Rp 4"

### Variante izdelka

WA IR RG	prikluček ... IR, rdeča litina, Rdeča litina
WA IR ST	prikluček ... IR, jeklo, jeklo (varljivo)
WA IR VA	prikluček ... IR, VA, nerjavno jeklo