


Lastnosti

Območje uporabe	Priključna armatura za kovinske cevi
Priključek 1	navojna puša s cilindričnim colskim notranjim navojem
Standard	DIN EN 10226 / ISO 7-1
Oblika izdelave	ravno
Material:	temprana litina
Uporaba	lotana izvedba, obstojna do 200 °C

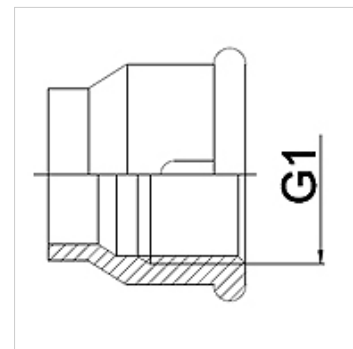

Navodilo

The specified working pressure PN(bar) relates to the working temperature of -20 °C to 120 °C. At working temperature of 120 °C to 200 °C the working pressure PN (bar) reduces to 22,7 bar.

Navodila za naročanje

Druge izvedbe na zahtevo

Artikel

Opis	DN	PN (bar)	G1
WA 004 IR	4	25	Rp 1/8"
WA 006 IR	6	25	Rp 1/4"
WA 010 IR	10	25	Rp 3/8"
WA 013 IR	13	25	Rp 1/2"
WA 020 IR	20	25	Rp 3/4"
WA 025 IR	25	25	Rp 1"
WA 032 IR	32	25	Rp 1.1/4"
WA 040 IR	40	25	Rp 1.1/2"
WA 050 IR	50	25	Rp 2"
WA 065 IR	65	25	Rp 2.1/2"
WA 080 IR	80	25	Rp 3"
WA 100 IR	100	25	Rp 4"

Variante izdelka

WA IR RG	priključek ... IR, rdeča litina, Rdeča litina
WA IR ST	priključek ... IR, jeklo, jeklo (varljivo)
WA IR VA	priključek ... IR, VA, nerjavno jeklo