

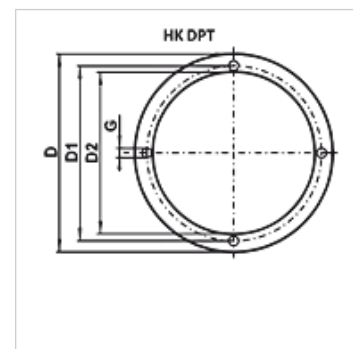

# HK DPT

tesnilo za nosilec črpalke

**Lastnosti**

Višina tesnila 2 mm

Material: NBR

**Opis**

za uporabo med nosilcem črpalke in montažno ploščo

**Artikel**

| Opis           | IEC motor velikost        | Ø D<br>(mm) | Ø D1<br>(mm) | Ø D2<br>(mm) | Ø G<br>(mm) | Teža<br>(kg) |
|----------------|---------------------------|-------------|--------------|--------------|-------------|--------------|
| HK DPT 160 NBR | 71A / 71B                 | 160,0       | 130,0        | 112,0        | 10          | 0,05         |
| HK DPT 200 NBR | 80A / 80B / 90S / 90L     | 200,0       | 165,0        | 147,0        | 12          | 0,05         |
| HK DPT 250 NBR | 100L / 112M               | 250,0       | 215,0        | 193,0        | 14          | 0,05         |
| HK DPT 300 NBR | 132S / 132M               | 300,0       | 265,0        | 235,0        | 14          | 0,08         |
| HK DPT 350 NBR | 160M / 160L / 180M / 180L | 350,0       | 300,0        | 261,0        | 19          | 0,10         |
| HK DPT 400 NBR | 200L                      | 400,0       | 350,0        | 301,0        | 19          | 0,16         |