


HK V1 865

Protipovratni ventil V1865

Lastnosti

| | |
|-------------------------|---|
| Izvedba | konusna blokada možnost deblokade - dvojno delovanje |
| Material: | Ohišje: pocinkano jeklo Notranji deli iz kaljenega jekla |
| Obratovalni tlak | maks. 350 bar |

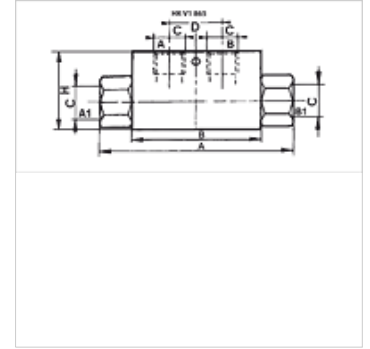

Artikel

| Opis | p max. (bar) | Tlak odprtja (bar) | Krmilno razmerje | Q max. (L/min) | A (mm) | B (mm) | C | D (mm) | H (mm) | Teža (kg) |
|------------------|-----------------|-----------------------|------------------|-------------------|-----------|-----------|------------|-----------|-----------|--------------|
| HK V1 865 0400 | 350 | 4,0 | 1:5.5 | 20 | 118 | 68 | 1/4" BSPP | 38 | 40 | 0,66 |
| HK V1 865 06NT | 350 | 4,0 | 1:5.5 | 30 | 118 | 68 | 3/8" BSPP | 38 | 40 | 0,66 |
| HK V1 865 0800 | 300 | 4,0 | 1:5 | 45 | 144 | 80 | 1/2" BSPP | 40 | 50 | 1,76 |
| HK V1 865 M18X15 | 350 | 4,0 | 1:5.5 | 20 | 118 | 68 | M 18 x 1,5 | 38 | 40 | 0,54 |