


# HK V7 867

## 8/3-potni preklopni ventil

### Lastnosti

|                  |  |
|------------------|--|
| <b>Izvedba</b>   | Tip A - srednji položaj odprto<br>Tip C - srednji položaj zaprto |
| <b>Material:</b> | Ohišje: litina, notranji deli iz jekla                           |

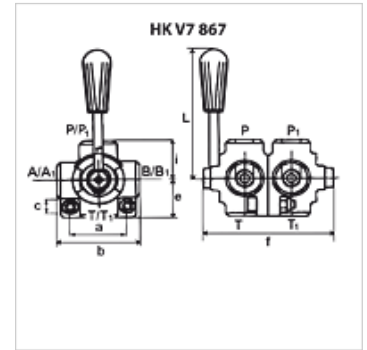

### Navodilo

Rotary slide valves can be pressurised from all sides and are designed to have less internal leakage

### Artikel

| Opis          | Tlak max.<br>(bar) | Priključki | Q max.<br>(L/min) | a<br>(mm) | b<br>(mm) | c<br>(mm) | e<br>(mm) | f<br>(mm) | i<br>(mm) | L<br>(mm) | Teža<br>(kg) |
|---------------|--------------------|------------|-------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--------------|
| HK V7 867 A06 | 250                | 3/8"       | 35                | 54        | 77        | 8,5       | 38,5      | 142       | 38,5      | 110       | 2,5          |
| HK V7 867 A08 | 250                | 1/2"       | 50                | 68        | 90        | 8,5       | 45,0      | 160       | 45,0      | 120       | 3,8          |
| HK V7 867 A12 | 220                | 3/4"       | 90                | 74        | 95        | 8,5       | 47,5      | 180       | 47,5      | 125       | 5,2          |
| HK V7 867 C06 | 250                | 3/8"       | 35                | 54        | 77        | 8,5       | 38,5      | 142       | 38,5      | 110       | 2,5          |
| HK V7 867 C08 | 250                | 1/2"       | 50                | 68        | 90        | 8,5       | 45,0      | 160       | 45,0      | 120       | 3,8          |
| HK V7 867 C12 | 220                | 3/4"       | 90                | 74        | 95        | 8,5       | 47,5      | 180       | 47,5      | 125       | 5,2          |