


# B FPM-C

Tesnilo batnice B-FPM/C


**HANSA FLEX**

## Lastnosti

|                    |                                      |
|--------------------|--------------------------------------|
| Način izdelave     | Tesnilo batnice                      |
| Obratovalni tlak   | do 250 bar                           |
| Drsna hitrost max. | 0,5 m/s                              |
| Temperatura min.   | -10 °C                               |
| Temperatura max.   | 150 °C                               |
| Sredstva           | Mineralna olja<br>vodne emulzije     |
| Montaža            | v zaprtih kanalih pri odprtih slotov |
| Material:          | FPM-C                                |
| Uporaba            | Hidravlika                           |



| Spaltmaß / Clearance   |        |
|------------------------|--------|
| Druck / Pressure (bar) | e (mm) |
| 160                    | < 0,2  |
| 250                    | < 0,1  |

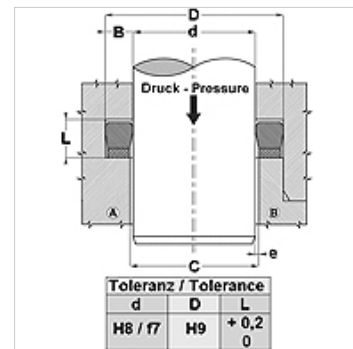

## Opis

tesnilo z majhnim trenjem.  
zelo dobro tesnenje pri nizkem tlaku.  
enostavna rešitev.

## Artikel

| Opis              | D (mm) | d (mm) | L (mm) |
|-------------------|--------|--------|--------|
| B 094 063-1 FPM-C | 24     | 16     | 6,4    |
| B 102 070-1 FPM-C | 26     | 18     | 6,4    |
| B 110 078-1 FPM-C | 28     | 20     | 6,4    |
| B 118 086-1 FPM-C | 30     | 22     | 6,4    |
| B 129 098-1 FPM-C | 33     | 25     | 6,4    |
| B 141 110 FPM-C   | 36     | 28     | 6,4    |
| B 149 118 FPM-C   | 38     | 30     | 6,4    |
| B 157 118 FPM-C   | 40     | 30     | 7,5    |
| B 157 125-1 FPM-C | 40     | 32     | 6,4    |
| B 169 137 FPM-C   | 43     | 35     | 6,4    |
| B 173 141 FPM-C   | 44     | 36     | 6,4    |
| B 188 157 FPM-C   | 48     | 40     | 6,4    |
| B 196 157 FPM-C   | 50     | 40     | 11,0   |
| B 216 177 FPM-C   | 55     | 45     | 8,0    |
| B 236 196 FPM-C   | 60     | 50     | 8,0    |
| B 236 196-1 FPM-C | 60     | 50     | 10,0   |
| B 255 216-1 FPM-C | 65     | 55     | 8,0    |
| B 275 236 FPM-C   | 70     | 60     | 8,0    |
| B 283 236 FPM-C   | 72     | 60     | 9,6    |
| B 322 275-1 FPM-C | 82     | 70     | 9,6    |
| B 362 314 FPM-C   | 92     | 80     | 9,6    |

## Variante izdelka

|            |   |
|------------|---|
| B Dichtung | Tesnilo batnice, B, s tkanino ojačan NBR                  |
| B M        | Tesnilo batnice, B-M, s tkanino ojačan NBR                |
| B NEI      | Tesnilo batnice, B-NEI, (1) Tesnilo: s tkanino ojačan NBR |