


OR 70° Shore EPDM

Tesnilni obroč, 70SH EPDM, zamrežen z žveplom

HANSA FLEX

Lastnosti

Način izdelave	O-ring
Temperatura min.	-30 °C
Temperatura max.	120 °C
Sredstva	HFC, HFD, para zrak
Material:	EPDM, zamrežen z žveplom, 70 Shore

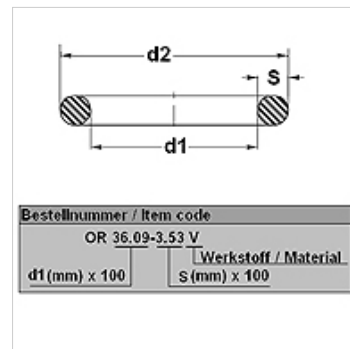

Artikel

Opis	d1 (mm)	d2 (mm)	s (mm)
OR 7-3 E 70S	7,00	13,00	3,00
OR 12-2 E 70S	12,00	16,00	2,00
OR 15-2 E 70S	15,00	19,00	2,00
OR 20-2 E 70S	20,00	24,00	2,00