


Lastnosti

| | |
|---------------------------|---|
| Način izdelave | Utomni obroč batnice |
| Obratovalni tlak | do 500 bar |
| Drsna hitrost max. | 0,5 m/s |
| Temperatura min. | -30 °C |
| Temperatura max. | 80 °C |
| Sredstva | Mineralna olja |
| Montaža | v zaprtih utorih A v odprtih utorih B |
| Material: | (1) Tesnilo: PUR (2) Podporni obroč: acetatna smola / PTBR |
| Uporaba | Hidravlika |



| Druck bar | Spaltmaß / Clearance e (mm) | | | |
|--------------|--------------------------------|--------|----------|--------|
| | RS...-L | | RS...-LA | |
| | d<60mm | d>60mm | d<60mm | d>60mm |
| 50 | < 0,40 | < 0,50 | < 0,60 | < 0,80 |
| 100 | < 0,30 | < 0,40 | < 0,60 | < 0,80 |
| 200 | < 0,20 | < 0,30 | < 0,40 | < 0,60 |
| 300 | < 0,15 | < 0,20 | < 0,30 | < 0,40 |
| 400 | < 0,10 | < 0,15 | < 0,20 | < 0,30 |
| 500 | | | < 0,10 | < 0,15 |

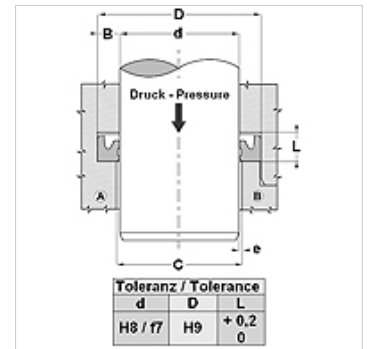

Opis

tesnilo z majhnim trenjem.
visoka obrabna odpornost
enostavna rešitev.
Primerno za teleskopske valje.

Artikel

| Opis | D (mm) | d (mm) | L (mm) | Utori skladno z |
|---------------|-----------|-----------|-----------|-----------------|
| RS 45 52-LA | 52,0 | 45 | 14,0 | - |
| RS 50 60-LA | 60,0 | 50 | 8,0 | - |
| RS 50 70-LA | 70,0 | 50 | 13,0 | - |
| RS 60 68-LA | 68,0 | 60 | 14,0 | - |
| RS 60 69-LA | 69,0 | 60 | 11,0 | - |
| RS 60 80-LA | 80,0 | 60 | 13,0 | - |
| RS 63 83-LA | 83,0 | 63 | 13,0 | - |
| RS 70 85-LA | 85,0 | 70 | 12,5 | - |
| RS 78 86-LA | 86,0 | 78 | 14,0 | - |
| RS 80 95-LA | 95,0 | 80 | 12,5 | ISO 5597 |
| RS 97 105-LA | 105,0 | 97 | 14,0 | - |
| RS 100 120-LA | 120,0 | 100 | 14,5 | - |
| RS 118 126-LA | 126,0 | 118 | 14,0 | - |
| RS 125 145-LA | 145,0 | 125 | 13,0 | - |
| RS 143 151-LA | 151,0 | 143 | 14,0 | - |